

ALBUZ®

Leader in ceramic spray nozzles



OTHER
SPRAYINGS



LOW
CROPS



Spray nozzles

PRECISION - RESISTANCE - EFFICACY - LONGEVITY



ORCHARD
VINEYARD




www.albuz-spray.com



ALBUZ®



COMPARATIVE WEAR TEST

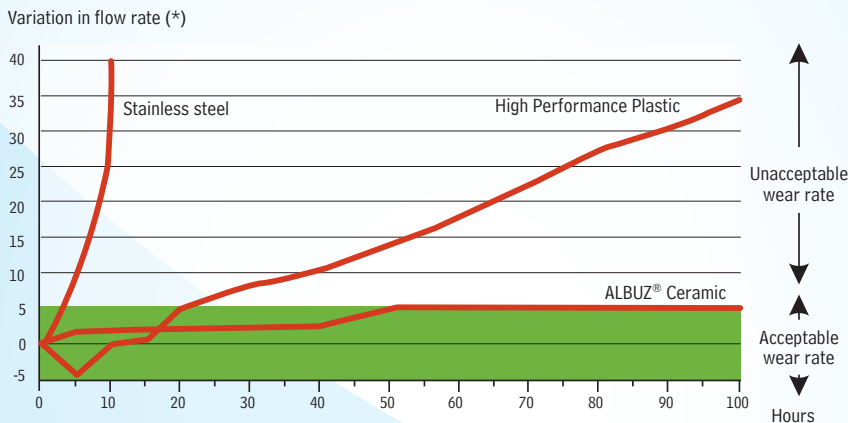

(*) Flow rate variation due to wear in % - Test in accordance with NFU.26.110 equivalent to ISO 5682-1

CERAMIC NOZZLE



Before



After 50 h

STAINLESS STEEL NOZZLE



Before



After 50 h

PRECISION WHICH LASTS

For more than 50 years we have been manufacturing and selling ceramic spraying nozzles for agricultural applications. Ceramic nozzles offer an excellent precision as well as an **exceptional resistance to wear, abrasion and chemicals.**

Manufacturing ceramic nozzles is a complex process. We have a long established expertise in that process and was awarded ISO 9001 Quality Certification.

The manufacturing, from raw materials to assembly and quality control, is done in our plant in Normandy, France.

The outstanding properties of our nozzles make ALBUZ® the unrivalled leader in ceramic spraying nozzles for the agriculture industry. Millions of farmers across more than 50 countries trust ALBUZ®. Our nozzles are made of a specific pink ceramic grade which is **as hard as diamond**. Their wear resistance is far higher than that of materials such as stainless steel, brass, plastics.

We guarantee a high spray quality and excellent flow rate precision, which allows our nozzles to be certified in numerous countries.

The correct use of our nozzles will enable you to both optimise, and reduce the cost of your agrochemical treatments.

SUMMARY



NOZZLE TECHNOLOGY

- 04 Droplet size, spraying quality
- 05 Classification of droplet sizes
- 06 Nozzle choice : speed of wind, spray coverage
- 07 Certification, how to read flow rate charts
- 08 Droplet size sprayed by nozzles according to the spraying pressure
- 08 The nozzle range



LOW CROPS

- 10 APE 80°-110° standard flat fan nozzle
- 11 ADE 110° drift reduction flat fan nozzle
- 12 AXI 80°-110° extended range flat fan nozzle
- 13 AXI-TWIN 120° double flat fan nozzle
- 14 CVI 110° low pressure Air induction flat fan nozzle
- 15 CVI-TWIN low pressure Air induction Twin flat fan nozzle
- 16 AVI 110° air induction flat fan nozzle
- 17 AVI-TWIN air induction twin flat fan nozzle
- 18 AVI-UC 110° air induction flat fan spray nozzle with ultra coarse droplet
- 18 FAST-CAP AVI-TWIN 110°, FAST-CAP AVI 80°/110°, FAST-CAP AVI-OC 80°
- 19 ADI 110° drift reduction flat fan nozzle



ORCHARD VINEYARD

- 20 ATR 80° hollow cone nozzle
- 21 ATR 60° hollow cone nozzle
- 22 ATI 80° hollow cone nozzle
- 23 ATI 40°/60° hollow cone nozzle
- 24 ATF 60°/80° full cone nozzle
- 25 TVI 80°/TVI-LP 80° air Induction hollow Cone nozzles
- 26 AVI 80° air induction flat fan nozzle
- 27 CVI 80° compact air induction flat fan nozzle
- 28 DISC & CORE ceramic hollow-cone nozzle
- 29 AMT metering Disc



OTHER SPRAYINGS

- 30 MSI wide angle flat fan nozzle
- 31 MVI air induction wide angle flat fan nozzle
- 32 ESI 6 streams fertilizer nozzle
- 33 FESI 6 streams compact cap fertilizer nozzle
- 34 OCI Off center nozzle
- 35 CVI-OC compact air induction off center flat fan nozzle
- 36 EXA 3 streams fertilizer nozzle
- 37 AVI-OC air injected off center nozzle



TECHNICAL INFORMATION

- 38 Filters protect, filter choice
- 39 Nozzle blister packaging, Nozzle cleaning brush and water sensitive paper
- 40 Albuz nozzle drift reduction homologation in France
- 41 FAST-CAP
- 42 Sprayer calibration, conversion factors
- 43 Nozzle cross-reference chart
- 44 Nozzle choice application for smartphones

www.albuz-spray.com



SPRAYING QUALITY

The objective of an agrochemical treatment is to reach a biological efficiency to satisfy the needs of the farmers. Several factors are key to the result of each application:

- **The product used, and its performance;**
- **Criteria influencing the application timing:**
 - › growth stage,
 - › pesticides,
 - › diseases,

- › general status of pesticide, disease, and weed activity,
- › climate,
- › spray quality.

The quality of the spraying application is the top priority of the engineering know-how and expertise of ALBUZ®. The nozzle is a key to the performance of the sprayer. It also influences the biological efficiency of the sprayed product.

Nozzles are characterized by:

- › Flow rate;
- › Angle;
- › Spray distribution quality (on the boom);
- › Droplet spectrum;
- › Distribution on target;
- › Drift classification.

ALBUZ® takes into account all those parameters in order to offer a product range that satisfies all the needs of the farming industry. ALBUZ® complies with all environmental regulations. We also anticipate future spraying innovations, by constant investment in R&D.

DROPLET SIZE


The «spray quality» of a nozzle is expressed in terms of its average droplet size in relation to the volume sprayed (VMD). This gives an indication of the risk of drift and of the nozzle to select for a particular application.

Examples:

- For post emergence contact fungicides, an AXI nozzle will be selected because of its VMD of 150 µm and its large number of droplets.
- For an anti-drift nozzle, the AVI or CVI, with a VMD of 450 µm might be chosen as these large droplets reduce the risk of drift.

VMD (µm)

Droplet Size Comparison: 03 Size Nozzle

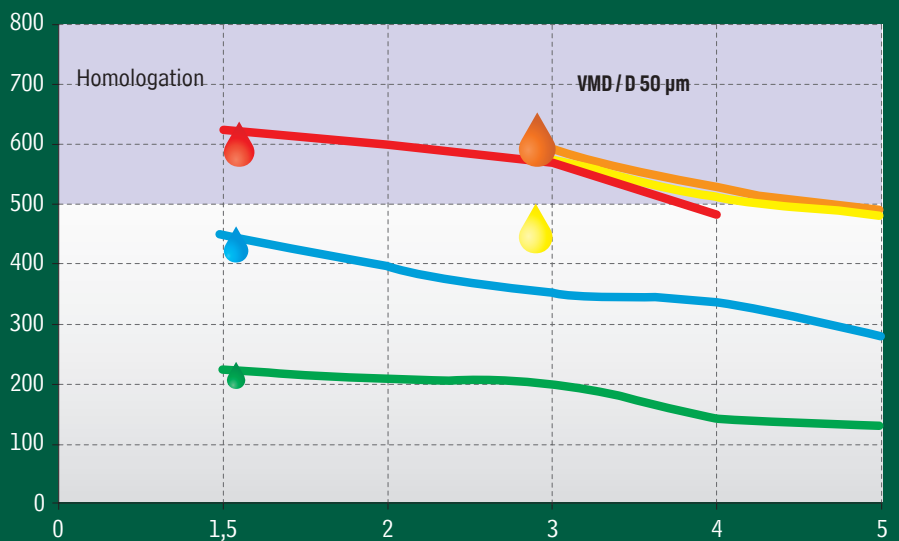

TYPE OF NOZZLES

Pressure (bar)



AVI 11003



AVI-TWIN 11003



CVI 11003



ADI 11003



AXI 11003

CLASSIFICATION OF DROPLET SIZES

The nozzle «spray quality» is divided into 6 categories, of which 4 main ones:

- **Fine:** (e.g. AXI) nozzles which produce fine droplets are more often recommended for post-emergence treatments where excellent coverage is necessary.

- **Medium:** (e.g. ADI) nozzles which produce medium droplets are less prone to produce drift, depending on the pressure used.

- **Coarse:** (e.g. AVI/CVI) nozzles which produce big droplets provide a low risk of drift.

- **Very Coarse:** (e.g. AVI) specific nozzles which produce very big droplets.

DROPLET SIZE SPRAYED BY NOZZLES ACCORDING TO THE SPRAYING PRESSURE

bar	ATR 80°									
	WHITE	LILAC	BROWN	YELLOW	ORANGE	RED	GREY	GREEN	BLACK	BLUE
5	VF	VF	VF	VF	VF	F	F	F	F	F
7	VF	VF	VF	VF	VF	F	F	F	F	F
10	VF	VF	VF	VF	VF	F	F	F	F	F
15	VF	VF	VF	VF	VF	VF	F	F	F	F
20	VF	VF	VF	VF	VF	VF	VF	VF	VF	VF

bar	ATR 60°								
	LILAC	BROWN	YELLOW	ORANGE	RED	GREY	GREEN	BLACK	BLUE
5	VF	VF	VF	F	F	F	F	F	F
7	VF	VF	VF	VF	F	F	F	F	F
10	VF	VF	VF	VF	F	F	F	F	F
15	VF	VF	VF	VF	VF	VF	VF	VF	VF
20	VF	VF	VF	VF	VF	VF	VF	VF	VF

bar	ATI 80°									
	LILAC 80-0050	PINK 80-0075	ORANGE 80-01	GREEN 80-015	YELLOW 80-02	PURPLE 80-025	BLUE 80-03	BROWN RED 80-035	RED 80-04	BROWN 80-05
5	VF	VF	VF	VF	VF	F	F	F	F	F
7	VF	VF	VF	VF	VF	F	F	F	F	F
10	VF	VF	VF	VF	VF	F	F	F	F	F
15	VF	VF	VF	VF	VF	VF	F	F	F	F
20	VF	VF	VF	VF	VF	VF	VF	VF	VF	VF

bar	ATI 60°							
	PINK 60-0075	ORANGE 60-01	GREEN 60-015	YELLOW 60-02	PURPLE 60-025	BLUE 60-03	RED 60-04	BROWN 60-05
5	VF	VF	VF	VF	F	F	F	F
7	VF	VF	VF	VF	F	F	F	F
10	VF	VF	VF	VF	VF	F	F	F
15	VF	VF	VF	VF	VF	F	F	F
20	VF	VF	VF	VF	VF	VF	VF	VF

bar	TVI 80°							
	LILAC 80-0050	PINK 80-0075	ORANGE 80-01	GREEN 80-015	YELLOW 80-02	PURPLE 80-025	BLUE 80-03	RED 80-04
5			UC	UC	UC	UC	UC	UC
7	UC	VC	UC	UC	UC	UC	UC	UC
10	XC	VC	XC	XC	XC	XC	UC	UC
15	VC	C	VC	VC	VC	XC	UC	UC

bar	ATF 80°				
	GREEN 80-015	YELLOW 80-02	PURPLE 80-025	BLUE 80-03	RED 80-04
3	F	F	F	F	F
5	F	F	F	F	F
10	VF	VF	F	F	F
15	VF	VF	VF	VF	VF

bar	MVI			
	RED 04	GREY 06	WHITE 08	LIGHT BLUE 10
1,5	UC	UC	UC	UC
2	UC	UC	UC	UC
3	UC	UC	UC	UC

bar	DISC & CORE						
	AD1/AC13	AD2/AC25	AD2/AC46	AD3/AC13	AD3/AC25	AD4/AC45	AD5/AC45
1,5	VF	VF	VF	VF	VF	F	F
2	VF	VF	VF	VF	VF	VF	VF
3	VF	VF	VF	VF	VF	VF	VF

VF Very fine
 F Fine
 M Medium
 C Coarse
 VC Very coarse
 XC Extremely coarse
 UC Ultra coarse


This droplet size classification is based on the VMD of the BCPC and ASABE S572.1 specifications at the date of printing. Classifications are subject to change.

NOZZLE CHOICE : SPEED OF WIND

Anti drift with air injection e.g.: AVI	with compression chamber e.g.: adi	Wide range of pressures e.g.: AXI	Normals e.g.: APE	Wind speed in mph (Takes into account the speed of the tractor in function of the direction of the wind)	Looking around us, one observes (Beaufort scale)
				0	Nothing moves
				0 - 1	Smoke rises straight up
				1 - 5	Smoke shows the direction of wind
				6 - 11	We feel the wind on our face and hear the rustle of leaves
				12 - 15	Leaves and twigs constantly in movement, flags flutter
				16 - 19	
				20 - 28	Papers, dust and sand blow about
				29 - 38	Pine branches sway
				39 - 49	Electric wires whistle
				50 - 61	It is difficult to walk against the wind

SPRAY COVERAGE

The chart below indicates the theoretical overlap of spray patterns. The theoretical width of nozzle spray is determined by the spray angle and by the nozzle height above the target. Considering the effect of earth gravity, the higher the nozzle above the target, the narrower the spray footprint of each nozzle, in relation to the theoretical footprint on the table below.

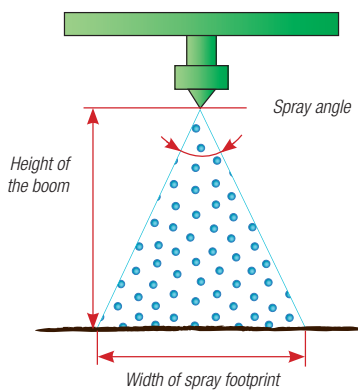

HEIGHT OF BOOMS



	Nozzle spacing 0,50 m	
	80°	110°

Minimum height	0,80 m	0,40 m
Double overlap A	0,60 m	0,35 m
Triple overlap B	0,90 m	0,70 m
Maximum height	1,20 m	0,80 m

Spray angle (°)	Height of spraying in relation to the plant or to the seedbed											
	20	25	30	35	40	45	50	55	60	70	80	90
15	5	7	8	9	11	12	13	14	16	18	21	24
20	7	9	11	12	14	16	18	19	21	25	28	32
25	9	11	13	16	18	20	22	24	27	31	35	40
30	11	13	16	19	21	24	27	29	32	38	43	48
35	13	16	19	22	25	28	32	35	38	44	50	57
40	15	18	22	25	29	33	36	40	44	51	58	66
45	17	21	25	29	33	37	41	46	50	58	66	75
50	19	23	28	33	37	42	47	51	56	65	75	84
55	21	26	31	36	42	47	52	57	62	73	83	94
60	23	29	35	40	46	52	58	64	69	81	92	104
65	25	32	38	45	51	57	64	70	76	89	102	115
70	28	35	42	49	56	63	70	77	84	98	112	126
75	31	38	46	54	61	69	77	84	92	107	123	138
80	34	42	50	59	67	76	84	92	101	117	134	151
85	37	46	55	64	73	82	92	101	110	128	147	165
90	40	50	60	70	80	90	100	110	120	140	160	180
95	44	55	65	76	87	98	109	120	131	153	175	196
100	48	60	72	83	95	107	119	131	143	167	191	215
110	57	71	86	100	114	129	143	157	171	200	229	
120	69	87	104	121	139	156	173	191	208	242		
130	86	107	129	150	172	193	214	236				
140	110	137	165	192	220	247						
150	149	187	224									
160	227											

10 No overlap - 10 double overlap - 10 triple overlap

10 quadruple overlap - 10 quintuple overlap



CERTIFICATION

SOME EUROPEAN COUNTRIES HAVE SPRAYING REGULATIONS WHICH REQUIRE SENSITIVE AREAS TO BE PROTECTED AND UNTREATED «BUFFER ZONES», IN ORDER TO REDUCE THE RISKS FROM SPRAY DRIFT.

THE DRIFT REFERS TO FINE DROPLETS WHICH DO NOT REACH THE TARGET.

THE FINEST DROPLETS [SMALLER THAN 100 µm] ARE THE MOST SUSCEPTIBLE TO DRIFT FROM THE EFFECT OF THE WIND OR OTHER INFLUENCES.

Drift can have hazardous consequences on:

- Water contamination;
- Human and animal health;
- Nearby vegetation.

ALBUZ® nozzles are certified in France, the United Kingdom, Germany, Belgium and the Netherlands. Please visit our web site to find out the list of our nozzles per country.

ISO and CEN standards specify tolerances on nozzle flow and on spray patternation, to help achieve a precise agrochemical application.

The flow of nozzles (low crops) may vary by +/- 10% maximum of the flow values indicated in the table, but they should vary by only +/-5% of the average value.

In relation to the patternation, this must give a coefficient of variation of less than 7% at a nozzle height specified by the manufacturer, and less than 9% for nozzle above and below that height.

HOW TO READ FLOW RATE CHARTS

Colour	ISO code	Mesh	(bar)	l/mn	Liters / hectare - Nozzle spacing: 50 cm								
					Sprayer speed								
					6 km/h	7 km/h	8 km/h	9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18km/h
GREEN	CVI 110015	80	1,5	0,42	84	72	63	56	50	42	36	32	28
			2	0,49	98	84	74	65	59	49	42	37	33
			2,5	0,54	108	93	81	72	65	54	46	41	36
			3	0,60	120	103	90	80	72	60	51	45	40
YELLOW	CVI 11002	80	1,5	0,57	114	98	86	76	68	57	49	43	38
			2	0,66	132	113	99	88	79	66	57	50	44
			2,5	0,73	146	125	110	97	88	73	63	55	49
			3	0,80	160	137	120	107	96	80	69	60	53
PURPLE	CVI 110025	50	1,5	0,71	142	122	107	95	85	71	61	53	47
			2	0,82	164	141	123	109	98	82	70	62	55
			2,5	0,91	182	156	137	121	109	91	78	68	61
			3	1,00	200	171	150	133	120	100	86	75	67


Nozzle to be selected

The flow tables are set out as follows: read the sprayer speed to be used, and follow the column down to the desired application rate in liters per hectare. Then follow this row to the left, and you will find the required spraying pressure and the nozzle to be used.

EXAMPLE

If you want a volume of 100 l/ha, at a working speed of 10 km/h, the nozzle to be used will be a lilac 110025 nozzle at 2 bars.


The AlbuZ application (see last page) also helps you selecting your nozzle.

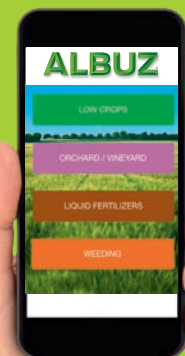



SELECTING YOUR NOZZLES

the nozzle range




LOW CROPS

	TYPE OF NOZZLES		SPRAY PATTERNATION	DROPLETS SIZE CHARACTERISTICS	DRIFT HAZARDS	PRESSURE RANGE	HERBICIDES		FUNGICIDES		INSECTICIDES	
	Model	Description					Incorporated treatment	Taken	Contact	Systemic	Contact	Systemic
	APE	Standard flat fan nozzle			Medium	2 - 3 bar	Good	Very Good*	Good	Very Good*	Very Good*	Very Good*
	ADE	Drift reduction flat fan nozzle			Low	2 - 3 bar	Very Good	Very Good	Very Good	Very Good	Very Good	Very Good
	AXI 80°/110°	Extended range flat fan nozzle			Medium	1,5 - 2 bar	Good	Very Good*	Good	Very Good*	Very Good*	Very Good*
	AXI-TWIN	double flat fan nozzle			Medium	1,5 - 3 bar	Good	Very Good*	Bon	Excellent*	Excellent*	Excellent*
	FAXI	Flat fan nozzle with compact cap			Medium	1,5 - 2 bar	Good	Very Good*	Good	Very Good*	Very Good*	Very Good*
	ADI 110°	Drift reduction flat fan nozzle			Low	2 - 3 bar	Very Good	Very Good	Very Good	Very Good	Very Good	Very Good
	CVI 110°	Low pressure Air induction flat fan nozzle			Very Low	1,5 - 3 bar	Very Good	Good	Good	Very Good	Good	Very Good
	CVI-TWIN	Low pressure Air induction Twin flat fan nozzle			Very Low	1,5 - 3 bar	Very Good	Good	Very Good	Very Good	Very Good	Very Good
	AVI 110°	Air induction flat fan nozzle			Very Low	3 - 5 bar	Very Good	Good	Good	Very Good	Good	Very Good
	AVI-JC 110°	Air induction flat fan nozzle with ultra coarse droplet			Tiny	3 - 5 bar	Very Good	Good	Good	Very Good	Good	Very Good
	AVI-TWIN 110°	Air induction Twin flat fan nozzle			Very Low	3 - 5 bar	Very Good	Good	Very Good	Very Good	Very Good	Very Good



*for a low pressure



ORCHARD, VINEYARD

TYPE OF NOZZLES	IMAGE	SPRAY PATTERN	DROPLETS SIZE CHARACTERISTICS	DRIFT HAZARDS	PRESSURE RANGE	HERBICIDES		FUNGICIDES		INSECTICIDES	
						Incorporated treatment	Taken	Contact	Systemic	Contact	Systemic
ATR 60° ATR 80° Hollow cone nozzle				High	5 - 20 bar			Very Good	Good	Very Good	Very Good
ATI 40° ATI 60° ATI 80° Hollow cone nozzle				High	5 - 20 bar			Very Good	Good	Very Good	Very Good
ATF 60° ATF 80° Full cone nozzle				High	3 - 15 bar		Good	Very Good	Very Good	Very Good	Very Good
TVI 80° Air Induction Hollow Cone nozzle				Very Low	5 - 10 bar			Very Good	Good	Very Good	Very Good
AVI 80° Air induction flat fan nozzle				Very Low	5 - 15 bar			Very Good	Good	Very Good	Very Good
CVI 80° Compact Air induction flat fan nozzle				Very Low	3 - 15 bar			Very Good	Good	Very Good	Very Good



OTHER SPRAYINGS

TYPE OF NOZZLES	IMAGE	SPRAY PATTERN	DROPLETS SIZE CHARACTERISTICS	DRIFT HAZARDS	PRESSURE RANGE	HERBICIDES		FUNGICIDES		INSECTICIDES	
						Incorporated treatment	Taken	Contact	Systemic	Contact	Systemic
MSI Wide Angle Flat fan nozzle				Medium	0,5 - 4 bar	Very Good	Very Good	Good		Good	Good
MVI Air induction Wide Angle Flat fan nozzle				Very Low	1,5 - 4 bar	Very Good	Very Good	Good		Good	Good
EXA 3 streams Fertilizer nozzle				Very Low	1 - 3 bar						Very Good
FESI 6 streams compact cap Fertilizer nozzle				Very Low	1,2 - 4 bar						Very Good
ESI 6 streams Fertilizer nozzle				Very Low	1,2 - 4 bar						Very Good
OCI Off center nozzle				Medium	2 - 4 bar	Good	Good	Good	Good	Very Good*	Good
CVI-OC Compact Air induction off center fan nozzle				Very Low	2 - 4 bar	Very Good	Very Good	Good	Very Good	Good	Very Good
AVI-OC Air injected off center nozzle				Very Low	3 - 5 bar	Very Good	Very Good	Good	Very Good	Good	Very Good

EUROPE


Specific body dimensions: 11 mm



LOW CROPS

catalog 2025

ALBUZ



European Colour code

APE 80°/110°

Standard flat fan nozzle

MAIN CHARACTERISTICS

- > Pink ALBUZ® ceramic orifice (excellent precision and high wear resistance).
- > Flat fan pattern angle 80° or 110°: spray overlap required to ensure uniform distribution on the ground.
- > Designed for all types of nozzle holders using caps which accept nozzles measuring 11 mm across flats.

SPECIFIC CHARACTERISTICS

- > Operates from 2 bar.
- > Flow rate characteristics, body size and color code meet ALBUZ® standards.
- > Produces medium-sized droplets.
- > **Minimum height boom recommended: 50/60 cm (110°) and 80/90 cm (80°).**
- > **Recommended pressure: 2 bar.**

APPLICATIONS

All types of treatments (herbicides, fungicides, insecticides...).

FLOW RATE CHART

Colour	Pressure (bar)	Icon	l/mn	Liters / hectare - Nozzle spacing: 50 cm							
				8 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h	20 km/h	22 km/h
YELLOW APE 80° / 110°	2	F	0,49	74	59	49	42	37	33	30	27
	2,5	F	0,55	83	66	55	47	42	37	33	31
	3	F	0,61	91	73	61	52	45	40	36	33
	3,5	F	0,65	98	79	65	56	49	44	39	36
	4	VF	0,70	105	84	70	60	53	47	42	38
ORANGE APE 80° / 110°	2	F	0,69	104	83	69	59	52	46	42	38
	2,5	F	0,77	116	93	77	66	58	52	46	43
	3	F	0,85	127	102	85	73	64	57	51	46
	3,5	F	0,92	138	110	92	79	69	61	55	50
RED APE 80° / 110°	2	F	0,99	148	119	99	85	74	66	59	54
	2,5	F	1,11	166	133	111	95	83	74	66	60
	3	F	1,21	182	145	121	104	91	81	73	66
	3,5	F	1,31	196	157	131	112	98	87	79	71
GREEN APE 80° / 110°	2	F	1,40	210	168	140	120	105	93	84	76
	2,5	F	1,57	235	188	157	134	117	104	94	85
	3	F	1,71	257	206	171	147	129	114	103	93
	3,5	F	1,85	278	222	185	159	139	123	111	101
TURQUOISE APE 80° / 110°	2	M	1,69	253	203	169	145	127	113	101	92
	2,5	F	1,89	283	227	189	162	142	126	113	103
	3	F	2,07	310	248	207	177	155	138	124	113
	3,5	F	2,24	335	268	224	192	168	149	134	122
BLUE APE 80° / 110°	2	M	1,98	297	238	198	170	148	132	119	108
	2,5	M	2,21	332	266	221	190	166	148	133	121
	3	F	2,42	364	291	242	208	182	162	145	132
	3,5	F	2,62	394	314	262	224	196	175	157	142
GREY APE 110°	2	C	2,79	418	334	279	239	209	186	167	152
	2,5	M	3,11	467	374	311	267	234	208	187	170
	3	M	3,41	512	409	341	292	256	227	205	186
	3,5	M	3,69	553	442	369	316	276	246	221	201
BLACK APE 110°	2	F	3,94	591	473	394	338	296	263	236	215
	2	C	3,95	592	473	395	338	296	263	237	215
	2,5	C	4,41	662	529	441	378	331	294	265	241
	3	C	4,83	725	580	483	414	362	322	290	263
IVORY APE 110°	2	M	5,22	783	626	522	447	391	348	313	285
	2	VC	5,61	842	674	561	481	421	374	337	307
	2,5	C	6,28	942	753	628	538	471	418	377	343
	3	C	6,88	1031	825	688	589	516	458	413	375
WHITE APE 110°	3,5	C	7,43	1114	891	743	637	557	495	446	405
	4	C	7,94	1191	953	794	681	596	529	476	433
	2	VC	7,82	1188	950	792	679	594	528	475	432
	2,5	VC	8,85	1328	1063	885	759	664	590	531	483
WHITE APE 110°	3	C	9,70	1455	1164	970	831	727	647	582	529
	3,5	C	10,48	1571	1257	1048	898	786	698	629	572
WHITE APE 110°	4	C	11,20	1680	1344	1120	960	840	747	672	611



2-4 bar



80° / 110°



LOW CROPS



ALBUZ catalog 2025

Specific body dimensions: 11 mm

EUROPE

Drift reduction flat fan nozzle

ADE 110°



European Colour code

SPECIFIC CHARACTERISTICS

- > Operates from 2 bar.
- > Flow rate characteristics, body size and color code meet ALBUZ® standards.
- > Drift reduction nozzle reduces by 50% the number of small droplets (<100µm).
- > Easy to dismantle and clean.
- > **Minimum height boom recommended: 50/60 cm.**
- > **Recommended pressure: 2 bar.**



Easy to dismantle and clean

MAIN CHARACTERISTICS

- > Pink ALBUZ® ceramic orifice (excellent precision and high wear resistance).
- > Flat fan pattern angle 110°: spray overlap required to ensure uniform distribution on the ground.
- > Designed for all types of nozzle holders using caps which accept nozzles measuring 11 mm across flats.
- > Drift reduction.

FLOW RATE CHART

Colour	Mesh	Pressure (bar)	Drop	l/mn	Liters / hectare - Nozzle spacing: 50 cm								
					8 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h	20 km/h	22 km/h	24 km/h
BROWN	100	2	M	0,35	53	42	35	30	26	23	21	19	18
		2,5	M	0,39	59	47	39	33	29	26	23	21	20
		3	M	0,43	65	52	43	37	32	29	26	23	22
		3,5	F	0,47	71	56	47	40	35	31	28	25	23
		4	F	0,50	75	60	50	43	38	33	30	27	25
YELLOW	100	2	M	0,49	74	59	49	42	37	33	30	27	25
		2,5	M	0,55	83	66	55	47	42	37	34	31	28
		3	F	0,61	91	73	61	52	45	41	37	33	31
		3,5	F	0,65	98	79	65	56	49	44	40	36	33
		4	F	0,70	105	84	70	60	53	47	42	38	35
ORANGE	50	2	M	0,69	104	83	69	59	52	46	41	38	35
		2,5	M	0,77	116	93	77	66	58	52	47	43	39
		3	F	0,85	127	102	85	73	64	57	51	46	43
		3,5	F	0,92	138	110	92	79	69	61	55	50	46
		4	F	0,98	147	118	98	84	74	65	59	53	49
RED	50	2	C	0,99	148	119	99	85	74	66	59	54	50
		2,5	M	1,11	166	133	111	95	83	73	66	60	55
		3	M	1,21	182	145	121	104	91	81	73	66	61
		3,5	M	1,31	196	157	131	112	98	87	79	71	66
		4	M	1,40	210	168	140	120	105	93	84	76	70
GREEN	50	2	C	1,40	210	168	140	120	105	93	84	76	70
		2,5	M	1,57	235	188	157	134	117	104	94	85	78
		3	M	1,71	257	206	171	147	129	114	103	93	86
		3,5	M	1,85	278	222	185	159	139	123	111	101	93
		4	M	1,98	297	238	198	170	149	131	118	107	99

APPLICATIONS

All types of treatments (herbicides, fungicides, insecticides...).



2-4 bar




110°



Specific body dimensions: 8 mm

ISO



ISO colour code

AXI 80°/110° Extended range flat fan nozzle

catalog 2025

LOW CROPS

ALBUZ

MAIN CHARACTERISTICS

- › Designed to be used over a wide range of pressures (from 1.5 to 3 bar).
- › Recommended for use at low pressure (around 1.5 bar) for low volume applications and spray drift reduction (bigger droplets).
- › May be used at higher pressure (above 2.5 bar) to improve target coverage (finer droplets).
- › Excellent for sprayers equipped with automated flow rate controllers (pressure changes do not affect the spray distribution).

SPECIFIC CHARACTERISTICS

- › Ceramic insert in a high resistance plastic body.
- › Adapted to any brand of sprayer.
- › Flow rate characteristics, body size and colour code meet international ISO standards.
- › Flat fan pattern, droplet size vary according to pressure.
- › **Minimum boom height recommended: 50/60 cm (110°) and 80/90 cm (80°).**
- › **Recommended pressure: 1.5 to 2 bar.**

AVAILABLE IN FAST CAP (Ref. : FAXI)
See page 41



FLOW RATE CHART

Colour	ISO Code	Mesh	Pressure (bar)	80°	110°	l/mn	Liters / hectare - Nozzle spacing: 50 cm								
							8 km/h	9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h	22 km/h	24 km/h
GREEN	AXI 110 015 80 015	100	1,5	F	F	0,42	63	56	50	42	36	32	28	23	21
			2	F	F	0,49	74	65	59	49	42	37	33	27	25
			2,5	F	F	0,54	81	72	65	54	46	41	36	30	28
			3	F	F	0,60	90	80	72	60	51	45	40	33	30
			3,5	F	F	0,64	96	85	77	64	55	48	43	35	33
YELLOW	AXI 110 02 80 02	100	4	VF	VF	0,69	104	92	83	69	59	52	46	38	35
			1,5	F	F	0,56	84	75	67	56	48	42	37	31	29
			2	F	F	0,66	99	88	79	66	57	50	44	35	33
			2,5	F	F	0,73	110	97	88	73	63	55	49	40	37
			3	F	F	0,80	120	107	96	80	69	60	53	44	40
PURPLE	AXI 110 025 80 025	50	3,5	F	F	0,86	129	115	103	86	74	65	57	47	43
			4	F	F	0,91	137	121	109	91	78	68	61	50	46
			1,5	M	M	0,71	107	95	85	71	61	53	47	39	36
			2	F	F	0,82	123	109	98	82	70	62	55	45	41
			2,5	F	F	0,91	137	121	109	91	78	68	61	50	46
BLUE	AXI 110 03 80 03	50	3	F	F	1,00	150	133	120	100	86	75	67	55	50
			3,5	F	F	1,08	162	144	130	108	93	81	72	59	54
			4	F	F	1,15	173	153	138	115	99	86	77	63	58
			1,5	M	M	0,85	128	113	102	85	73	64	57	46	43
			2	M	M	0,98	147	131	118	98	84	74	65	53	49
RED	AXI 110 04 80 04	50	2,5	M	M	1,10	165	147	132	110	94	83	73	60	55
			3	M	M	1,20	180	160	144	120	103	90	80	65	60
			3,5	F	F	1,30	195	173	156	130	111	98	87	71	65
			4	F	F	1,39	209	185	167	139	119	104	93	76	70
			1,5	M	M	1,13	170	151	136	113	97	85	75	62	57
BROWN	AXI 110 05 80 05	50	2	M	M	1,31	197	175	157	131	112	98	87	71	66
			2,5	M	M	1,46	219	195	175	146	125	110	97	80	73
			3	M	M	1,60	240	213	192	160	137	120	107	87	80
			3,5	M	M	1,73	260	231	208	173	148	130	115	94	87
			4	F	F	1,85	278	247	222	185	159	139	123	101	93
GREY	AXI 110 06 80 06	50	1,5	M	M	1,41	212	188	169	141	121	106	94	77	71
			2	M	M	1,63	245	217	196	163	140	122	109	89	82
			2,5	M	M	1,82	273	243	218	182	156	137	121	100	92
			3	M	M	2,00	300	267	240	200	171	150	133	109	100
			3,5	M	M	2,16	324	288	259	216	185	162	144	118	108
WHITE	AXI 110 08	50	4	M	M	2,30	345	307	276	230	197	173	153	126	116
			1,5	M	C	1,70	255	227	204	170	146	128	113	93	85
			2	M	M	1,96	294	261	235	196	168	147	131	107	98
			2,5	M	M	2,19	329	292	263	219	188	164	146	119	110
			3	M	M	2,40	360	320	288	240	206	180	160	131	120

APPLICATIONS

All types of treatments (herbicides, fungicides, insecticides...).



1,5-3 bar



80° / 110°

1,5 bar



3 bar

LOW CROPS



ALBUZ

catalog 2025

Twin flat fan nozzle

AXI-TWIN 120°

Specific body dimensions: 11 mm

ISO



ISO colour code

SPECIFIC CHARACTERISTICS

- > Ceramic insert in a high resistance plastic body.
- > Adapted to any brand of sprayer.
- > Flow rate characteristics, body size and colour code meet international ISO standards.
- > Flat fan pattern, droplet size vary according to pressure.
- > **Minimum boom height recommended: 50 cm.**

MAIN CHARACTERISTICS

- > **Improve the penetration into the vegetation or the dense foliage.**
- > Fine droplets for a maximal cover.
- > The nozzles produce 2 flat fans of 120 ° spaced out by 70 ° optimizing the cover.
- > Excellent for the phytosanitary products of contact.

FLOW RATE CHART

Colour	ISO Code	Mesh	Pressure (bar)	M	l/mn	Liters / hectare - Nozzle spacing: 50 cm								
						8 km/h	9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h	22 km/h	24 km/h
YELLOW	AXI-TWIN 120 02	200 Mesh	1,5	M	0,56	84	75	67	56	48	42	37	31	29
			2	F	0,66	99	88	79	66	57	50	44	35	33
			2,5	F	0,73	110	97	88	73	63	55	49	40	37
			3	VF	0,80	120	107	96	80	69	60	53	44	40
			3,5	VF	0,86	129	115	103	86	74	65	57	47	43
			4	VF	0,91	137	121	109	91	78	68	61	50	46
BLUE	AXI-TWIN 120 03	100 Mesh	1,5	M	0,85	128	113	102	85	73	64	57	46	43
			2	F	0,98	147	131	118	98	84	74	65	53	49
			2,5	F	1,10	165	147	132	110	94	83	73	60	55
			3	VF	1,20	180	160	144	120	103	90	80	65	60
			3,5	VF	1,30	195	173	156	130	111	98	87	71	65
			4	VF	1,39	209	185	167	139	119	104	93	76	70
RED	AXI-TWIN 120 04	100 Mesh	1,5	M	1,13	170	151	136	113	97	85	75	62	57
			2	F	1,31	197	175	157	131	112	98	87	71	66
			2,5	F	1,46	219	195	175	146	125	110	97	80	73
			3	VF	1,60	240	213	192	160	137	120	107	87	80
			3,5	VF	1,73	260	231	208	173	148	130	115	94	87
			4	VF	1,85	278	247	222	185	159	139	123	101	93
BROWN	AXI-TWIN 120 05	100 Mesh	1,5	M	1,41	212	188	169	141	121	106	94	77	71
			2	F	1,63	245	217	196	163	140	122	109	89	82
			2,5	F	1,82	273	243	218	182	156	137	121	100	92
			3	F	2,00	300	267	240	200	171	150	133	109	100
			3,5	VF	2,16	324	288	259	216	185	162	144	118	108
			4	VF	2,30	345	307	276	230	197	173	153	126	116
			5	VF	2,58	387	344	310	258	221	194	172	141	129

APPLICATIONS


All types of treatments (herbicides, fungicides, insecticides...).



1,5-5 bar



1,5 bar



5 bar

ISO

Specific body dimensions: 8 mm



ISO colour code



LOW CROPS

catalog 2025

ALBUZ

CVI 110°

Low pressure Air induction flat fan nozzle

MAIN CHARACTERISTICS

- › Designed to be used over a wide range of pressures (from 1.5 to 3 bar).
- › Pink ALBUZ® ceramic orifice (excellent precision and high wear resistance).
- › Flat fan pattern angle 110°. Wide angle flat spray: overlap required to ensure uniform distribution on the ground.
- › Designed for all types of nozzle holders, using the same cap as ISO nozzles (for example: AXI).

SPECIFIC CHARACTERISTICS

- › Air induction fan nozzle (venturi system): sprays large drops filled with air bubbles which do not drift and which burst into fine droplets on contact with the plant.
- › Almost totally eliminate drift, while increasing the number of impacts (excellent coverage of the treated zone).
- › Anti-clogging design and double air-intake orifice.
- › Compact design (22 mm length) adapted to all booms and nozzles-holders.
- › **Minimum height boom recommended: 50/60 cm.**
- › **Recommended pressure : 2 bar.**

FLOW RATE CHART

Colour	ISO code	Mesh	Pressure (bar)	Drop	l/mn	Liters / hectare - Nozzle spacing: 50 cm									
						9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h	20 km/h	22 km/h	24 km/h	26 km/h
GREEN	CVI 110015	100	1,5	VC	0,42	56	50	42	36	32	28	25	23	21	19
			2	VC	0,49	65	59	49	42	37	33	29	27	25	23
			2,5	VC	0,54	72	65	54	46	41	36	32	30	28	25
			3	VC	0,60	80	72	60	51	45	40	36	33	30	28
			4	C	0,69	92	83	69	59	52	46	41	38	35	32
YELLOW	CVI 11002	100	1,5	VC	0,57	76	68	57	49	43	38	34	31	29	26
			2	VC	0,66	88	79	66	57	50	44	44	35	33	30
			2,5	VC	0,73	97	88	73	63	55	49	48	40	37	34
			3	C	0,80	107	96	80	69	60	53	52	44	40	37
			4	C	0,91	121	109	91	78	68	61	55	50	46	42
PURPLE	CVI 110025	50	1,5	VC	0,71	95	85	71	61	53	47	35	39	36	33
			2	VC	0,82	109	98	82	70	62	55	49	45	41	38
			2,5	C	0,91	121	109	91	78	68	61	55	50	46	42
			3	C	1,00	133	120	100	86	75	67	60	55	50	46
			4	C	1,15	153	138	115	99	86	77	69	63	58	53
BLUE	CVI 11003	50	1,5	VC	0,85	113	102	85	73	64	57	51	46	43	39
			2	VC	0,98	131	118	98	84	74	65	66	53	49	45
			2,5	C	1,10	147	132	110	94	83	73	72	60	55	51
			3	C	1,20	160	144	120	103	90	80	78	65	60	55
			4	C	1,39	185	167	139	119	104	93	83	76	70	64
RED	CVI 11004	50	1,5	VC	1,13	151	136	113	97	85	75	68	62	57	52
			2	C	1,31	175	157	131	112	98	87	80	71	66	60
			2,5	C	1,46	195	175	146	125	110	97	87	80	73	67
			3	C	1,60	213	192	160	137	120	107	94	87	80	74
			4	VC	1,85	247	222	185	159	139	123	111	101	93	85
BROWN	CVI 11005	50	1,5	VC	1,41	188	169	141	121	106	94	85	77	71	65
			2	C	1,63	217	196	163	140	122	109	98	89	82	75
			2,5	C	1,82	247	220	183	156	137	121	110	100	92	84
			3	C	2,00	267	240	200	171	150	133	120	109	100	92
			4	XC	2,31	308	277	231	198	173	154	139	126	116	107
5	VC	2,58	344	310	258	221	194	172	155	141	129	119			

APPLICATIONS

All types of treatments (systemic and contact products) including liquid fertilizers.



1,5-5 bar



110°



LOW CROPS



ALBUZ

catalog 2025

Low pressure
Air induction
Twin flat fan nozzle

CVI-TWIN

Specific body dimensions:
8 mm

ISO



ISO colour code

SPECIFIC CHARACTERISTICS

- > The inclination of the fans improves the penetration into the vegetation.
- > Air induction nozzle (Venturi system) : sprays large drops filled with air bubbles, which do not drift and burst to form finer droplets on contact with the plant.
- > Anti-clogging design and double air-intake orifice.
- > Compact design (22 mm length) adapted to all booms and nozzles-holders.
- > **Minimum height boom recommended: 50/60 cm.**
- > **Recommended pressure: 2 bar.**
- > **Use 80 mesh filters for green (015) and yellow (02) models.**

MAIN CHARACTERISTICS

- > **Designed to be used over a wide range of pressures (from 1.5 to 3 bar).**
- > Pink ALBUZ® ceramic Double-orifices (excellent precision and high wear resistance).
- > Flat fan pattern angle 110°. Wide angle flat spray: overlap required to ensure uniform distribution on the ground.
- > Designed for all types of nozzle holders, using the same cap which accept nozzles measuring 8 mm across flats. (for example: AXI and CVI).

FLOW RATE CHART

Colour	ISO code	Mesh	Pressure (bar)	Drop	l/mn	Liters / hectare - Nozzle spacing: 50 cm									
						9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h	20 km/h	22 km/h	24 km/h	26 km/h
GREEN	CVI-TWIN 110015	100 Mesh	1,5	VC	0,42	56	50	42	36	32	28	25	23	21	19
			2	VC	0,49	65	59	49	42	37	33	29	27	25	23
			2,5	VC	0,54	72	65	54	46	41	36	32	30	28	25
			3	VC	0,60	80	72	60	51	45	40	36	33	30	28
YELLOW	CVI-TWIN 11002 JKI G1927	100 Mesh	1,5	VC	0,57	76	68	57	49	43	38	34	31	29	26
			2	VC	0,66	88	79	66	57	50	44	44	35	33	30
			2,5	VC	0,73	97	88	73	63	55	49	48	40	37	34
			3	C	0,80	107	96	80	69	60	53	52	44	40	37
PURPLE	CVI-TWIN 110025 JKI G1904	50 Mesh	1,5	VC	0,71	95	85	71	61	53	47	35	39	36	33
			2	VC	0,82	109	98	82	70	62	55	49	45	41	38
			2,5	C	0,91	121	109	91	78	68	61	55	50	46	42
			3	C	1,00	133	120	100	86	75	67	60	55	50	46
BLUE	CVI-TWIN 11003 JKI G1903	50 Mesh	1,5	VC	0,85	113	102	85	73	64	57	51	46	43	39
			2	VC	0,98	131	118	98	84	74	65	66	53	49	45
			2,5	C	1,10	147	132	110	94	83	73	72	60	55	51
			3	C	1,20	160	144	120	103	90	80	78	65	60	55
RED	CVI-TWIN 11004 JKI G1905	50 Mesh	1,5	VC	1,13	151	136	113	97	85	75	68	62	57	52
			2	C	1,31	175	157	131	112	98	87	80	71	66	60
			2,5	C	1,46	195	175	146	125	110	97	87	80	73	67
			3	C	1,60	213	192	160	137	120	107	94	87	80	74
BROWN	CVI-TWIN 11005 JKI G1928	50 Mesh	1,5	VC	1,41	188	169	141	121	106	94	85	77	71	65
			2	C	1,63	217	196	163	140	122	109	98	89	82	75
			2,5	C	1,82	247	220	183	156	137	121	110	100	92	84
			3	C	2,00	267	240	200	171	150	133	120	109	100	92

APPLICATIONS

All types of treatment (systemic and contact products) including liquid fertilizers.



1,5-5 bar



ISO

Specific body dimensions: 11 mm



ISO colour code

AVI 110° Air induction flat fan nozzle

catalog 2025

LOW CROPS

ALBUZ

MAIN CHARACTERISTICS

- > **Designed to be used over a wide range of pressures (from 3 to 5 bar).**
- > Pink ALBUZ® ceramic double orifices (excellent precision and high wear resistance).
- > Flat fan pattern angle 110°.
- > Wide angle flat : spray overlap ensuring uniform distribution on the ground.
- > Designed for all types nozzle-holders.
- > Designed for all types of nozzle-holders, using the same cap as ALBUZ® APE nozzles.

SPECIFIC CHARACTERISTICS

- > Air-injected fan nozzle (venturi system) : sprays large drops charged with air bubbles ; the AVI 110° model is certified at 75 anti-drift.
- > Almost totally eliminate drift, while increasing the number of impacts (excellent coverage of the treated zone).
- > Anti-clogging design and double air-intake orifice.
- > Compact design (28 mm length) adapted to all booms and nozzle holders.
- > **Minimum height boom recommended: 50/60 cm.**
- > **Recommended pressure: 3 bar.**

FLOW RATE CHART

Colour	ISO code	Mesh	Pressure (bar)	Drop	l/mn	Liters / hectare - Nozzle spacing: 50 cm										
						8 km/h	9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h	20 km/h	22 km/h	24 km/h	26 km/h
ORANGE	AVI 110 01	100	3	VC	0,40	60	53	48	40	34	30	27	24	22	20	18
			4	C	0,46	69	61	55	46	39	35	31	28	25	23	21
			5	C	0,52	78	69	62	52	45	39	35	31	28	26	24
GREEN	AVI 110 015	100	3	VC	0,60	90	80	72	60	51	45	40	36	33	30	28
			4	C	0,69	104	92	83	69	59	52	46	41	38	35	32
			5	C	0,77	116	103	92	77	66	58	51	46	42	39	36
YELLOW	AVI 110 02	100	3	VC	0,80	120	107	96	80	69	60	53	48	44	40	37
			4	C	0,91	137	121	109	91	78	68	61	55	50	46	42
			5	C	1,03	155	137	124	103	88	77	69	62	56	52	48
PURPLE	AVI 110 025 JKI G 1620	50	3	VC	1,00	150	133	120	100	86	75	67	60	55	50	46
			4	C	1,15	173	153	138	115	99	86	77	69	63	58	53
			5	C	1,29	194	172	155	129	111	97	86	77	70	65	60
BLUE	AVI 110 03 JKI G 1606	50	3	XC	1,20	180	160	144	120	103	90	80	72	65	60	55
			4	C	1,39	209	185	167	139	119	104	93	83	76	70	64
			5	C	1,55	233	207	186	155	133	116	103	93	85	78	72
RED	AVI 110 04 JKI G 1605	50	3	XC	1,60	240	213	192	160	137	120	107	96	87	80	74
			4	VC	1,85	278	247	222	185	159	139	123	111	101	93	85
			5	VC	2,07	311	276	248	207	177	155	138	124	113	104	96
BROWN	AVI 110 05	50	3	XC	2,00	300	267	240	200	171	150	133	120	109	100	92
			4	XC	2,31	347	308	277	231	198	173	154	139	126	116	107
			5	VC	2,58	387	344	310	258	221	194	172	155	141	129	119
GREY	AVI 110 06	50	3	XC	2,40	360	320	288	240	206	180	160	144	131	120	111
			4	XC	2,77	416	369	332	277	237	208	185	166	151	139	128
			5	VC	3,10	465	413	372	310	266	233	207	186	169	155	143
WHITE	AVI 110 08	50	3	XC	3,20	480	427	384	320	274	240	213	192	175	160	148
			4	XC	3,70	555	493	444	370	317	278	247	222	202	185	171
			5	XC	4,13	620	551	496	413	354	310	275	248	225	207	191
LIGHT BLUE*	AVI 110 10	50	3	XC	4,00	600	533	480	400	343	300	267	240	218	200	185
			4	XC	4,62	693	616	554	462	396	347	308	277	252	231	213
			5	XC	5,16	774	688	619	516	442	387	344	310	281	258	238

APPLICATIONS

All types of treatments (systemic and contact products) including liquid fertilizers.



* this nozzle was before black color

LOW CROPS



ALBUZ catalog 2025

Air induction Twin flat fan nozzle

AVI-TWIN

Specific body dimensions: 11 mm

ISO



ISO colour code

SPECIFIC CHARACTERISTICS

- > The inclination of the fans improves the penetration of the vegetation.
- > Air induction nozzle (venturi system) : sprays large drops filled with air bubbles, which do not drift and burst to form finer droplets on contact with the plant.
- > Almost totally eliminate drift, while increasing the number of impacts (excellent coverage of the treated zone).
- > Anti-clogging design and double air-intake orifices.
- > Compact design length (28 mm length) fits all booms and nozzle holders.
- > **Minimum height boom recommended: 50/60 cm.**

MAIN CHARACTERISTICS

- > Double-orifices pink ALBUZ® ceramic (excellent precision and high wear resistance).
- > Two flat-fan patterns with 110° angles.
- > Wide flat angle: spray overlap required to ensure uniform distribution on the ground.
- > Designed for all types of nozzle holders, using the same cap as ALBUZ® APE / AVI (11 mm) nozzles.

FLOW RATE CHART


Colour	ISO code	Mesh	(bar)	l/mn	Liters / hectare - Nozzle spacing: 50 cm										
					8 km/h	9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h	20 km/h	22 km/h	24 km/h	26 km/h
ORANGE	AVI-TWIN 11001	100	3 XG	0,40	60	53	48	40	34	30	27	24	22	20	18
			4 XG	0,46	69	61	55	46	39	35	31	28	25	23	21
			5 G	0,52	78	69	62	52	45	39	35	31	28	26	24
GREEN	AVI-TWIN 110015	100	3 XG	0,60	90	80	72	60	51	45	40	36	33	30	28
			4 XG	0,69	104	92	83	69	59	52	46	41	38	35	32
			5 G	0,77	116	103	92	77	66	58	51	46	42	39	36
YELLOW	AVI-TWIN 11002	100	3 XG	0,80	120	107	96	80	69	60	53	48	44	40	37
			4 XG	0,91	137	121	109	91	78	68	61	55	50	46	42
			5 G	1,03	155	137	124	103	88	77	69	62	56	52	48
PURPLE	AVI-TWIN 110025	50	3 XG	1,00	150	133	120	100	86	75	67	60	55	50	46
			4 XG	1,15	173	153	138	115	99	86	77	69	63	58	53
			5 TG	1,29	194	172	155	129	111	97	86	77	70	65	60
BLUE	AVI-TWIN 11003	50	3 XG	1,20	180	160	144	120	103	90	80	72	65	60	55
			4 XG	1,39	209	185	167	139	119	104	93	83	76	70	64
			5 TG	1,55	233	207	186	155	133	116	103	93	85	78	72
RED	AVI-TWIN 11004 JKI G 1750	50	3 XG	1,60	240	213	192	160	137	120	107	96	87	80	74
			4 XG	1,85	278	247	222	185	159	139	123	111	101	93	85
			5 TG	2,07	311	276	248	207	177	155	138	124	113	104	96
BROWN	AVI-TWIN 11005	50	3 XG	2,00	300	267	240	200	171	150	133	120	109	100	92
			4 XG	2,31	347	308	277	231	198	173	154	139	126	116	107
			5 TG	2,58	387	344	310	258	221	194	172	155	141	129	119
GREY	AVI-TWIN 11006	50	3 XG	2,40	360	320	288	240	206	180	160	144	131	120	111
			4 XG	2,77	416	369	332	277	237	208	185	166	151	139	128
			5 XG	3,10	465	413	372	310	266	233	207	186	169	155	143

APPLICATIONS

All types of treatment (systemic and contact products). Designed to be used over a wide range of pressures (from 3 to 5 bar).



3-5 bar



ISO

Dimensions:
11 mm



ISO color code



LOW
CROPS

catalog 2025

ALBUZ

AVI-UC 110° Air induction flat fan nozzle with ultra coarse droplet

MAIN CHARACTERISTICS

- > Designed to be used over a wide range of pressures (from 3 to 5 bar).
- > Pink ALBUZ® ceramic double orifices (excellent precision and high wear resistance).
- > Flat fan pattern angle 110°. spray overlap ensuring uniform distribution on the ground
- > Designed for all types nozzle-holders.

SPECIFIC CHARACTERISTICS

- > Air-injected fan nozzle (venturi system) : sprays large drops charged with air bubbles. **90% anti-drift homologation.**
- > Almost totally eliminate drift, while increasing the number of impacts (excellent coverage of the treated zone).
- > Anti-clogging design and double air-intake orifice.
- > Compact design (28 mm length) adapted to all booms and nozzle holders.
- > **Minimum height boom recommended: 50/60 cm.**
- > **Recommended pressure: 3 bar.**

APPLICATIONS


Tous types de traitement (produits systémiques et de contact) y compris l'application d'engrais liquides



3-5 bar



110°



	ISO code	#	Bar	UC	l/mn	Liters / hectare - Nozzle spacing: 50 cm										
						8 km/h	9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h	20 km/h	22 km/h	24 km/h	26 km/h
GREEN	AVI-UC 110 015	100 Mesh	3	UC	0,60	90	80	72	60	51	45	40	36	33	30	28
			4	UC	0,69	104	92	83	69	59	52	46	41	38	35	32
			5	UC	0,77	116	103	92	77	66	58	51	46	42	39	36
YELLOW	AVI-UC 110 02	100 Mesh	3	UC	0,80	120	107	96	80	69	60	53	48	44	40	37
			4	UC	0,91	137	121	109	91	78	68	61	55	50	46	42
			5	UC	1,03	155	137	124	103	88	77	69	62	56	52	48
PURPLE	AVI-UC 110 025	50 Mesh	3	UC	1,00	150	133	120	100	86	75	67	60	55	50	46
			4	UC	1,15	173	153	138	115	99	86	77	69	63	58	53
			5	UC	1,29	194	172	155	129	111	97	86	77	70	65	60
BLUE	AVI-UC 110 03	50 Mesh	3	UC	1,20	180	160	144	120	103	90	80	72	65	60	55
			4	UC	1,39	209	185	167	139	119	104	93	83	76	70	64
			5	UC	1,55	233	207	186	155	133	116	103	93	85	78	72
RED	AVI-UC 110 04	50 Mesh	3	UC	1,60	240	213	192	160	137	120	107	96	87	80	74
			4	UC	1,85	278	247	222	185	159	139	123	111	101	93	85
			5	UC	2,07	311	276	248	207	177	155	138	124	113	104	96
BROWN	AVI-UC 110 05	50 Mesh	3	UC	2,00	300	267	240	200	171	150	133	120	109	100	92
			4	UC	2,31	347	308	277	231	198	173	154	139	126	116	107
			5	UC	2,58	387	344	310	258	221	194	172	155	141	129	119

LOW CROPS



ALBUZ


catalog 2025

Drift reduction flat fan nozzle

ADI 110°

Specific body dimensions: 8 mm

ISO



ISO colour code

SPECIFIC CHARACTERISTICS

- > Flow rate characteristics, body size and colour code meet international ISO standard.
- > Drift reduction nozzle reduces by 50% the number of small droplets (<100µm).
- > Easy to dismantle and clean.
- > **Minimum height boom recommended: 50/60 cm.**
- > **Recommended pressure: 2 bar.**



Easy to dismantle and clean

MAIN CHARACTERISTICS

- > Pink ALBUZ® ceramic orifice (excellent precision and high wear resistance).
- > Flat fan pattern angle 110°: spray overlap required to ensure uniform distribution on the ground.
- > Designed for all types of nozzle holders with caps which accept nozzles to ISO dimensions (8 mm across flats).
- > Drift reduction.

FLOW RATE CHART

Colour	ISO CODE	Mesh	(bar)	l/mn	Liters / hectare - Nozzle spacing: 50 cm												
					6 km/h	7 km/h	8 km/h	9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h	20 km/h	22 km/h	24 km/h	
ORANGE	ADI 11001	100	2	M	0,32	64	55	48	43	38	32	27	24	21	19	18	17
			2,5	M	0,36	72	62	54	48	43	36	31	27	24	22	20	19
			3	M	0,40	80	69	60	53	48	40	34	30	27	24	22	20
			3,5	F	0,43	86	74	65	57	52	43	37	32	29	26	23	22
			4	F	0,46	92	79	69	61	55	46	39	35	31	28	25	23
GREEN	ADI 110015	100	2	M	0,49	98	84	74	65	59	49	42	37	33	29	27	25
			2,5	M	0,54	108	93	81	72	65	54	46	41	36	32	30	28
			3	F	0,60	120	103	90	80	72	60	51	45	40	36	33	30
			3,5	F	0,64	128	110	96	85	77	64	55	48	43	38	35	33
			4	F	0,69	138	118	104	92	83	69	59	52	46	41	38	35
YELLOW	ADI 11002	100	2	M	0,66	132	113	99	88	79	66	57	50	44	40	35	33
			2,5	M	0,73	146	125	110	97	88	73	63	55	49	44	40	37
			3	F	0,80	160	137	120	107	96	80	69	60	53	48	44	40
			3,5	F	0,86	172	147	129	115	103	86	74	65	57	52	47	43
			4	F	0,91	182	156	137	121	109	91	78	68	61	55	50	46
PURPLE	ADI 110025	50	2	M	0,82	164	141	123	109	98	82	70	62	55	49	45	41
			2,5	M	0,91	182	156	137	121	109	91	78	68	61	55	50	46
			3	F	1,00	200	171	150	133	120	100	86	75	67	60	55	50
			3,5	F	1,08	216	185	162	144	130	108	93	81	72	65	59	54
			4	F	1,15	230	197	173	153	138	115	99	86	77	69	63	58
BLUE	ADI 11003	50	2	C	0,98	196	168	147	131	118	98	84	74	65	59	53	49
			2,5	M	1,10	220	189	165	147	132	110	94	83	73	66	60	55
			3	M	1,20	240	206	180	160	144	120	103	90	80	72	65	60
			3,5	M	1,30	260	223	195	173	156	130	111	98	87	78	71	65
			4	M	1,39	278	238	209	185	167	139	119	104	93	83	76	70
RED	ADI 11004	50	2	C	1,31	262	225	197	175	157	131	112	98	87	79	71	66
			2,5	M	1,46	292	250	219	195	175	146	125	110	97	88	80	73
			3	M	1,60	320	274	240	213	192	160	137	120	107	96	87	80
			3,5	M	1,73	346	297	260	231	208	173	148	130	115	104	94	87
			4	M	1,85	370	317	278	247	222	185	159	139	123	111	101	93

APPLICATIONS

All types of treatments (herbicides, fungicides, insecticides...).



2-4 bar



110°





European Colour code

ATR 80° Hollow cone nozzle

MAIN CHARACTERISTICS

- > Angle of 80° at 5 bar.
- > Hollow cone nozzle producing fine droplets.
- > ALBUZ® durable pink ceramic allows high pressure spraying while maintaining nozzle performance and precision.








SPECIFIC CHARACTERISTICS

- > Easy dismantling for cleaning.
- > JKI certified.
- > Can be used on a sprayer boom from 3 bar pressure.
- > Precision polished ceramic surfaces of internal components ensure perfect sealing of the swirl chamber to give precise flowrate.
- > **Recommended pressure: 5 to 10 bar.**
- > Information about droplets size (see page 5)

APPLICATIONS

For fungicides and insecticides. Recommended for orchard and vineyards.

FLOW RATE CHART [l/min]

Pressure (bar)	WHITE	LILAC	BROWN	YELLOW	ORANGE	RED	GREY	GREEN	BLACK	BLUE	PURPLE
		 G 1348	 G 1349	 G 1350	 G 1351	 G 1352		 G 1353		 G 1354	
5	0,27	0,36	0,48	0,73	0,99	1,38	1,50	1,78	2,00	2,45	3,05
6	0,29	0,39	0,52	0,80	1,08	1,51	1,63	1,94	2,18	2,67	3,32
7	0,32	0,42	0,56	0,86	1,17	1,62	1,76	2,09	2,35	2,87	3,57
8	0,34	0,45	0,60	0,92	1,24	1,73	1,87	2,22	2,50	3,06	3,81
9	0,36	0,48	0,64	0,97	1,32	1,83	1,98	2,35	2,64	3,24	4,03
10	0,38	0,50	0,67	1,03	1,39	1,92	2,08	2,47	2,78	3,40	4,23
11	0,39	0,52	0,70	1,07	1,45	2,01	2,17	2,58	2,90	3,56	4,43
12	0,41	0,55	0,73	1,12	1,51	2,09	2,26	2,69	3,03	3,71	4,61
13	0,43	0,57	0,76	1,17	1,57	2,17	2,35	2,79	3,14	3,85	4,79
14	0,44	0,59	0,79	1,21	1,63	2,25	2,43	2,89	3,26	3,99	4,96
15	0,46	0,61	0,81	1,25	1,69	2,33	2,51	2,99	3,36	4,12	5,12
16	0,47	0,63	0,84	1,29	1,74	2,40	2,59	3,08	3,47	4,25	5,28
17	0,48	0,64	0,86	1,33	1,79	2,47	2,67	3,17	3,57	4,37	5,43
18	0,50	0,66	0,89	1,37	1,84	2,54	2,74	3,25	3,67	4,49	5,58
19	0,51	0,68	0,91	1,40	1,89	2,60	2,81	3,34	3,76	4,61	5,73
20	0,52	0,70	0,93	1,44	1,94	2,67	2,88	3,42	3,85	4,72	5,87
21	0,54	0,71	0,95	1,48	1,99	2,73	2,95	3,50	3,94	4,84	6,00
22	0,55	0,73	0,98	1,51	2,03	2,79	3,01	3,57	4,03	4,94	6,14
23	0,56	0,74	1,00	1,54	2,07	2,85	3,07	3,65	4,12	5,05	6,27
24	0,57	0,76	1,02	1,58	2,12	2,91	3,14	3,72	4,20	5,15	6,4
25	0,58	0,77	1,04	1,61	2,16	2,97	3,20	3,80	4,28	5,25	6,52



5-20 bar



80°





Hollow cone
nozzle

ATR 60°



European
Colour code

SPECIFIC CHARACTERISTICS

- > Easy dismantling for cleaning.
- > The angle of 60 degrees :
 - Is mostly recommended during the use of the Shielded Sprayer or Tunnel sprayer.
 - The drift is reduced on the top part of the target during the process
- > Can be used on a sprayer boom from 3 bar pressure.
- > Precision polished ceramic surfaces of internal components ensure perfect sealing of the swirl chamber to give precise flowrate.
- > **Recommended pressure: 5 to 10 bar.**
- > Information about droplets size (see page 5)

MAIN CHARACTERISTICS

- > Angle of 60° at 5 bar.
- > Hollow cone nozzle producing fine droplets.
- > The **green cap** is used to specify that the nozzles has an angle of 60 degrees.
- > ALBUZ® durable pink ceramic allows high pressure spraying while maintaining nozzle performance and precision.

FLOW RATE CHART (l/min)

Pressure (bar)	LILAC	BROWN	YELLOW	ORANGE	RED	GREY	GREEN	BLACK	BLUE
5	0,36	0,48	0,73	0,99	1,38	1,50	1,78	2,00	2,45
6	0,39	0,52	0,80	1,08	1,51	1,63	1,94	2,18	2,67
7	0,42	0,56	0,86	1,17	1,62	1,76	2,09	2,35	2,87
8	0,45	0,60	0,92	1,24	1,73	1,87	2,22	2,50	3,06
9	0,48	0,64	0,97	1,32	1,83	1,98	2,35	2,64	3,24
10	0,50	0,67	1,03	1,39	1,92	2,08	2,47	2,78	3,40
11	0,52	0,70	1,07	1,45	2,01	2,17	2,58	2,90	3,56
12	0,55	0,73	1,12	1,51	2,09	2,26	2,69	3,03	3,71
13	0,57	0,76	1,17	1,57	2,17	2,35	2,79	3,14	3,85
14	0,59	0,79	1,21	1,63	2,25	2,43	2,89	3,26	3,99
15	0,61	0,81	1,25	1,69	2,33	2,51	2,99	3,36	4,12
16	0,63	0,84	1,29	1,74	2,40	2,59	3,08	3,47	4,25
17	0,64	0,86	1,33	1,79	2,47	2,67	3,17	3,57	4,37
18	0,66	0,89	1,37	1,84	2,54	2,74	3,25	3,67	4,49
19	0,68	0,91	1,40	1,89	2,60	2,81	3,34	3,76	4,61
20	0,70	0,93	1,44	1,94	2,67	2,88	3,42	3,85	4,72
21	0,71	0,95	1,48	1,99	2,73	2,95	3,50	3,94	4,84
22	0,73	0,98	1,51	2,03	2,79	3,01	3,57	4,03	4,94
23	0,74	1,00	1,54	2,07	2,85	3,07	3,65	4,12	5,05
24	0,76	1,02	1,58	2,12	2,91	3,14	3,72	4,20	5,15
25	0,77	1,04	1,61	2,16	2,97	3,20	3,80	4,28	5,25

APPLICATIONS

For fungicides and insecticides. Recommended for orchard and vineyards.



5-20 bar



60°



ISO



ORCHARD
VINEYARD

catalog 2025

ALBUZ



ISO colour code

ATI 80° Hollow cone nozzle

MAIN CHARACTERISTICS

- > Angle of 80° at 5 bar.
- > Hollow cone nozzle producing fine droplets.
- > The **grey cap** is used to specify that the nozzles has an angle of 80 degrees.
- > ALBUZ® durable pink ceramic allows high pressure spraying while maintaining nozzle performance and precision.

SPECIFIC CHARACTERISTICS

- > **Flow rate characteristics, colour code meet international ISO standards.**
- > Easy dismantling for cleaning.
- > The angle of 80 degrees may be matched with TVI 80° nozzles in order to optimize applications.
- > Can be used on a sprayer boom from 3 bar pressure.
- > Precision polished ceramic surfaces of internal components ensure perfect sealing of the swirl chamber to give precise flowrate.
- > **Recommended pressure: 5 to 10 bar.**
- > Information about droplets size (see page 5)

APPLICATIONS

For fungicides and insecticides. Recommended for orchard and vineyards.

FLOW RATE CHART (l/min)

Pressure (bar)	LILAC 80-0050	PINK 80-0075	ORANGE 80-01	GREEN 80-015	YELLOW 80-02	PURPLE 80-025	BLUE 80-03	RED 80-04	BROWN 80-05	GREY 80-06
5	0,26	0,39	0,52	0,77	1,03	1,29	1,55	2,07	2,58	3,10
6	0,28	0,42	0,57	0,85	1,13	1,41	1,70	2,26	2,83	3,39
7	0,31	0,46	0,61	0,92	1,22	1,53	1,83	2,44	3,06	3,67
8	0,33	0,49	0,65	0,98	1,31	1,63	1,96	2,61	3,27	3,92
9	0,35	0,52	0,69	1,04	1,39	1,73	2,08	2,77	3,46	4,16
10	0,37	0,55	0,73	1,10	1,46	1,83	2,19	2,92	3,65	4,38
11	0,38	0,57	0,77	1,15	1,53	1,91	2,30	3,06	3,83	4,60
12	0,40	0,60	0,80	1,2	1,6	2,00	2,40	3,20	4,00	4,80
13	0,42	0,62	0,83	1,25	1,67	2,08	2,50	3,33	4,16	5,00
14	0,43	0,65	0,86	1,30	1,73	2,16	2,59	3,46	4,32	5,18
15	0,45	0,67	0,89	1,34	1,79	2,24	2,68	3,58	4,47	5,37
16	0,46	0,69	0,92	1,39	1,85	2,31	2,77	3,70	4,62	5,54
17	0,48	0,71	0,95	1,43	1,90	2,38	2,86	3,81	4,76	5,71
18	0,49	0,73	0,98	1,47	1,96	2,45	2,94	3,92	4,90	5,88
19	0,50	0,75	1,01	1,51	2,01	2,52	3,02	4,03	5,03	6,04
20	0,52	0,77	1,03	1,55	2,07	2,58	3,10	4,13	5,16	6,20



5-20 bar



80°





Hollow cone
nozzle

ATI 40°/60°



ISO colour code

SPECIFIC CHARACTERISTICS

- › Flow rate characteristics, colour code meet international ISO standards.
- › Easy dismantling for cleaning.
- › The angle of 60 degrees :
 - Is mostly recommended during the use of the Shielded Sprayer or Tunnel sprayer.
 - The drift is reduced on the top part of the target during the process
- › Can be used on a sprayer boom from 3 bar pressure.
- › Precision polished ceramic surfaces of internal components ensure perfect sealing of the swirl chamber to give precise flowrate.
- › **Recommended pressure: 5 to 10 bar.**
- › Information about droplets size (see page 5)

MAIN CHARACTERISTICS

- › Angle of 60° at 5 bar
- › Hollow cone nozzle producing fine droplets
- › The green cap is used to specify that the nozzles has an angle of 60 degrees
- › ALBUZ® durable pink ceramic allows high pressure spraying while maintaining nozzle performance and precision

FLOW RATE CHART [l/min]

Pressure (bar)	PINK 60-0075	ORANGE 60-01	GREEN 60-015	YELLOW 40-02 60-02	PURPLE 60-025	BLUE 40-03 60-03	RED 40-04 60-04	BROWN 40-05 60-05	GREY 60-06
5	0,39	0,52	0,77	1,03	1,29	1,55	2,07	2,58	3,10
6	0,42	0,57	0,85	1,13	1,41	1,70	2,26	2,83	3,39
7	0,46	0,61	0,92	1,22	1,53	1,83	2,44	3,06	3,67
8	0,49	0,65	0,98	1,31	1,63	1,96	2,61	3,27	3,92
9	0,52	0,69	1,04	1,39	1,73	2,08	2,77	3,46	4,16
10	0,55	0,73	1,10	1,46	1,83	2,19	2,92	3,65	4,38
11	0,57	0,77	1,15	1,53	1,91	2,30	3,06	3,83	4,60
12	0,60	0,80	1,2	1,6	2,00	2,40	3,20	4,00	4,80
13	0,62	0,83	1,25	1,67	2,08	2,50	3,33	4,16	5,00
14	0,65	0,86	1,30	1,73	2,16	2,59	3,46	4,32	5,18
15	0,67	0,89	1,34	1,79	2,24	2,68	3,58	4,47	5,37
16	0,69	0,92	1,39	1,85	2,31	2,77	3,70	4,62	5,54
17	0,71	0,95	1,43	1,90	2,38	2,86	3,81	4,76	5,71
18	0,73	0,98	1,47	1,96	2,45	2,94	3,92	4,90	5,88
19	0,75	1,01	1,51	2,01	2,52	3,02	4,03	5,03	6,04
20	0,77	1,03	1,55	2,07	2,58	3,10	4,13	5,16	6,20

APPLICATIONS

For fungicides and insecticides. Recommended for orchard and vineyards.



5-20 bar



40°/60°



ISO



ORCHARD
VINEYARD

catalog 2025

ALBUZ



ISO colour code

ATF 60°/80° Full cone nozzle

MAIN CHARACTERISTICS

- > Angle of 80° at 3 bar.
- > Full cone nozzle producing fine droplets.
- > Albus durable pink ceramic allows high pressure spraying while maintaining nozzle performance and precision.

SPECIFIC CHARACTERISTICS

- > Flow rate characteristics, colour code meet international ISO standards.
- > Use 100 mesh nozzle filters for models 80 015 and 80 02.
- > Can be used on a sprayer boom (spacing nozzle between 35cm and 50 cm)
- > **Recommended pressure on sprayer boom : 3 bar**
- > **Recommended pressure for Orchard or Vineyard : 5 bar**
- > Information about droplets size (see page 5)

TABEAU DE DÉBITS

Colour	Mesh	(bar)	l / mn	Litres par hectare - Distance entre 2 buses : 50 cm										
				4 km / h	5 km / h	6 km / h	8 km / h	9 km / h	10 km / h	12 km / h	14 km / h	16 km / h	18 km / h	20 km / h
GREEN 80-015	100	3	0,60	180	144	120	90	80	72	60	51	45	40	36
		4	0,69	207	166	138	104	92	83	69	59	52	46	41
		5	0,77	231	185	154	116	103	92	77	66	58	51	46
YELLOW 80-02	100	3	0,80	240	192	160	120	107	96	80	69	60	53	48
		4	0,91	276	221	184	137	121	109	91	78	68	61	55
		5	1,03	309	247	206	155	137	124	103	88	77	69	62
PURPLE 80-025	50	3	1,00	300	240	200	150	133	120	100	86	75	67	60
		4	1,15	345	276	230	173	153	138	115	99	86	77	69
		5	1,29	387	310	258	194	172	155	129	111	97	86	77
BLUE 80-03 80-03	50	3	1,20	360	288	240	180	160	144	120	103	90	80	72
		4	1,39	417	334	278	209	185	167	139	119	104	93	83
		5	1,55	465	372	310	233	207	186	155	133	116	103	93
RED 80-04 80-04	50	3	1,60	480	384	320	240	213	192	160	137	120	107	96
		4	1,85	555	444	370	278	247	222	185	159	139	123	111
		5	2,07	621	497	414	311	276	248	207	177	155	138	124
BROWN 80-05 80-05	50	3	2	600	480	400	300	267	240	200	171	150	133	120
		4	2,31	693	554	462	347	308	277	231	198	173	154	139
		5	2,58	774	619	516	387	344	310	258	221	194	172	155

APPLICATIONS


For fungicides and insecticides. Recommended for orchard and vineyards. Recommended to work on a dense vegetation.



3-20 bar



60°/80°



Pression (bar)	litres / mn					
	GREEN 80-015	YELLOW 80-02	PURPLE 80-025	BLUE 80-03 80-03	RED 80-04 80-04	BROWN 80-05 80-05
3	0,60	0,80	1,00	1,20	1,60	2,00
4	0,69	0,91	1,15	1,39	1,85	2,31
5	0,77	1,03	1,29	1,55	2,07	2,58
6	0,85	1,13	1,41	1,70	2,26	2,83
7	0,92	1,22	1,53	1,83	2,44	3,06
8	0,98	1,31	1,63	1,96	2,61	3,27
9	1,04	1,39	1,73	2,08	2,77	3,46
10	1,10	1,46	1,83	2,19	2,92	3,65
11	1,15	1,53	1,91	2,30	3,06	3,83
12	1,2	1,6	2,00	2,40	3,20	4,00
13	1,25	1,67	2,08	2,50	3,33	4,16
14	1,30	1,73	2,16	2,59	3,46	4,32
15	1,34	1,79	2,24	2,68	3,58	4,47
16	1,39	1,85	2,31	2,77	3,70	4,62
17	1,43	1,90	2,38	2,86	3,81	4,76
18	1,47	1,96	2,45	2,94	3,92	4,90
19	1,51	2,01	2,52	3,02	4,03	5,03
20	1,55	2,07	2,58	3,10	4,13	5,16



Air Induction
Hollow Cone
nozzle

TVI 80°



ISO colour code

SPECIFIC CHARACTERISTICS

- › Easy dismantling for a good cleaning.
- › 3 ceramic components for more wear resistance.
- › Can be used on a boom from a pressure of 5 bar using a special bayonette cap.
- › Compact size: length 19 mm.
- › Model 80 0050: recommended pressure from 7 bar.
- › **Recommended pressure: 5 to 10 bar.**
- › Information about droplets size (see page 5)

MAIN CHARACTERISTICS

- › 80° angle at 5 bar.
- › Air-induction hollow cone nozzle (Venturi system) spraying large drops filled with air bubbles which do not drift and explode into fine droplets in contact with the plant.
- › ALBUZ® durable pink ceramic allows high spraying pressures to be used while maintaining performance and precision.

NEW

3 low pressure nozzles

Purple, pink and orange

TVI LP

Models not JKI approved to date

IMPORTANT ! Use 200 mesh nozzle filters for models 80 0050 - 80 0075 and 100 mesh filters for the other sizes.

FLOW RATE CHART [L/MIN]

bar	LILAC 80-0050	PINK 80-0075	ORANGE 80-01	GREEN 80-015	YELLOW 80-02	PURPLE 80-025	BLUE 80-03	RED 80-04
3	0,20	0,30	0,40	-	-	-	-	-
4	0,23	0,35	0,46	-	-	-	-	-
5	0,26	0,39	0,52	0,77	1,03	1,29	1,55	2,07
6	0,28	0,42	0,57	0,85	1,13	1,41	1,70	2,26
7	0,31	0,46	0,61	0,92	1,22	1,53	1,83	2,44
8	0,33	0,49	0,65	0,98	1,31	1,63	1,96	2,61
9	0,35	0,52	0,69	1,04	1,39	1,73	2,08	2,77
10	0,37	0,55	0,73	1,10	1,46	1,83	2,19	2,92
11	0,38	0,57	0,77	1,15	1,53	1,91	2,30	3,06
12	0,40	0,60	0,80	1,2	1,6	2,00	2,40	3,20
13	0,42	0,62	0,83	1,25	1,67	2,08	2,50	3,33
14	0,43	0,65	0,86	1,30	1,73	2,16	2,59	3,46
15	0,45	0,67	0,89	1,34	1,79	2,24	2,68	3,58
16	0,46	0,69	0,92	1,39	1,85	2,31	2,77	3,70
17	0,48	0,71	0,95	1,43	1,90	2,38	2,86	3,81
18	0,49	0,73	0,98	1,47	1,96	2,45	2,94	3,92
19	0,50	0,75	1,01	1,51	2,01	2,52	3,02	4,03
20	0,52	0,77	1,03	1,55	2,07	2,58	3,10	4,13
21	0,53	0,79	1,06	1,59	2,12	2,65	3,17	4,23
22	0,54	0,81	1,08	1,62	2,17	2,71	3,25	4,33
23	0,55	0,83	1,11	1,66	2,22	2,77	3,32	4,43
24	0,57	0,85	1,13	1,70	2,26	2,83	3,39	4,53
25	0,58	0,87	1,15	1,73	2,31	2,89	3,46	4,62

APPLICATIONS

For fungicide and insecticide treatments. Recommended for orchard and vineyards.

3-20 bar

80°

Specific body dimensions: 11 mm

ISO



ISO colour code



ORCHARD VINEYARD

catalog 2025

ALBUZ

AVI 80° Air induction flat fan nozzle

MAIN CHARACTERISTICS


- > Designed to be used over a wide range of pressures (from 5 to 15 bar).
- > Pink ALBUZ® ceramic orifice with excellent precision and high wear resistance.
- > Flat fan pattern, angle of 80° at 3 bars.
- > Can be used for treatments up to 8 metres height.

SPECIFIC CHARACTERISTICS





- > Air induction nozzle (Venturi System): sprays large droplets charged with air bubbles, which minimise drift, burst on impact with the target, spreading fine droplets over the plant surfaces.
- > Increase retention of the product on the foliage, and reduce product losses to the ground.
- > Reduce dramatically the drift, while enhancing the number of "impacts" of product on the target, (excellent coverage of the treated zones)
- > Anti-clogging design and double air-intake orifices.
- > Compact design (length 28 mm) adapted to all booms and nozzle holders.
- > **Recommended pressure : 5 to 10 bar**

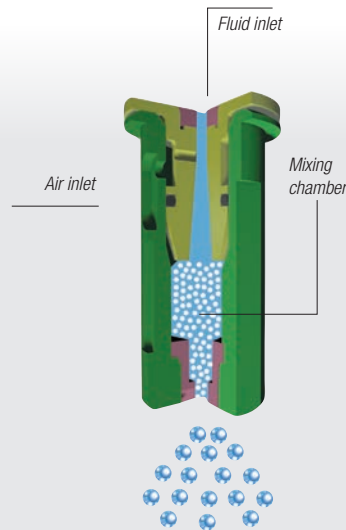APPLICATIONS

Particularly recommended for the orchards treatments of systemic and contact products.



FLOW RATE CHART (l/min)

	ORANGE 8001	GREEN 80015	YELLOW 8002	PURPLE 80025	BLUE 8003	RED 8004
Pressure (bar)	 G 1721	 G 1634	 G 1635		 G 1636	
	100 Mesh	100 Mesh	100 Mesh	50 Mesh	50 Mesh	50 Mesh
5	0,52	0,77	1,03	1,29	1,55	2,07
6	0,57	0,85	1,13	1,41	1,7	2,26
7	0,61	0,92	1,22	1,53	1,83	2,44
8	0,65	0,98	1,31	1,63	1,96	2,61
9	0,69	1,04	1,39	1,73	2,08	2,77
10	0,73	1,10	1,46	1,83	2,19	2,92
11	0,77	1,15	1,53	1,91	2,30	3,06
12	0,80	1,20	1,60	2,00	2,40	3,20
13	0,83	1,25	1,67	2,08	2,50	3,33
14	0,86	1,30	1,73	2,16	2,59	3,46
15	0,89	1,34	1,79	2,24	2,68	3,58
16	0,92	1,39	1,85	2,31	2,77	3,70
17	0,95	1,43	1,90	2,38	2,86	3,81
18	0,98	1,47	1,96	2,45	2,94	3,92
19	1,01	1,51	2,01	2,52	3,02	4,03
20	1,03	1,55	2,07	2,58	3,10	4,13



5-20 bar



80°





Specific body
dimensions: 8 mm

ISO

Compact air induction
flat fan nozzle

CVI 80°



ISO colour code




SPECIFIC CHARACTERISTICS

- > Air induction nozzle (Venturi System): sprays large droplets filled with air bubbles, which minimise drift and burst in contact with the target, spreading fine droplets over the plant surfaces.
- > Increase retention of the product on the foliage, and reduce product losses to the ground.
- > Reduce dramatically the drift, while enhancing the number of "impacts" of product on the target, (excellent coverage of the treated zones).
- > Anti-clogging design and double air-intake orifices.
- > Compact design (length 22 mm) adapted to all booms and nozzle holders.
- > **Recommended pressure: 3 to 10 bar.**

MAIN CHARACTERISTICS

- > **Designed to be used over a wide range of pressures (from 3 to 15 bar).**
- > Pink ALBUZ® ceramic orifice (excellent precision and high wear resistance).
- > Flat fan pattern, angle of 80° at 3 bars.
- > Can be used for treatments up to 8 metres height.

FLOW RATE CHART [l/min]

Pressure (bar)	ORANGE 8001	GREEN 80015	YELLOW 8002	PURPLE 80025	BLUE 8003	RED 8004	BROWN 8005	GREY 8006
	 G 1900	 G 1901	 G 1902					
	100 Mesh	100 Mesh	100 Mesh	50 Mesh	50 Mesh	50 Mesh	50 Mesh	50 Mesh
3	0,40	0,60	0,80	1,00	1,20	1,60	2,00	2,40
4	0,46	0,69	0,92	1,15	1,39	1,85	2,31	2,77
5	0,52	0,77	1,03	1,29	1,55	2,07	2,58	3,10
6	0,57	0,85	1,13	1,41	1,70	2,26	2,83	3,39
7	0,61	0,92	1,22	1,53	1,83	2,44	3,06	3,67
8	0,65	0,98	1,31	1,63	1,96	2,61	3,27	3,92
9	0,69	1,04	1,39	1,73	2,08	2,77	3,46	4,16
10	0,73	1,10	1,46	1,83	2,19	2,92	3,65	4,38
11	0,77	1,15	1,53	1,91	2,30	3,06	3,83	4,60
12	0,80	1,20	1,60	2,00	2,40	3,20	4,00	4,80
13	0,83	1,25	1,67	2,08	2,50	3,33	4,16	5,00
14	0,86	1,30	1,73	2,16	2,59	3,46	4,32	5,18
15	0,89	1,34	1,79	2,24	2,68	3,58	4,47	5,37
16	0,92	1,39	1,85	2,31	2,77	3,70	4,62	5,54
17	0,95	1,43	1,90	2,38	2,86	3,81	4,76	5,71
18	0,98	1,47	1,96	2,45	2,94	3,92	4,90	5,88

APPLICATIONS

Particularly recommended
for the application of
systemic and contact
products.



3-15 bar



80°





DISC & CORE Ceramic hollow-cone nozzle



SPECIFIC CHARACTERISTICS

- > ALBUZ® durable pink ceramic construction allows high spraying pressures to be used while maintaining performance and precision.
- > Hollow cone nozzle spraying fine droplets.
- > The combinations of Discs (AD) and Cores (AC) allow a wide choice of uses.

- > **Recommended pressure: 10 bar.**
- > Information about droplets size (see page 5)

HOLLOW CONE TABLE

	Orifice diameters	l / mn								Angles	
		3 bar	4 bar	5 bar	6 bar	10 bar	15 bar	20 bar	10 bar	20 bar	
AD 1	AC 13	0,80	0,24	0,27	0,30	0,33	0,41	0,49	0,56	70°	79°
AD 2	AC 13	1,02	0,31	0,35	0,39	0,42	0,53	0,64	0,73	87°	97°
AD 3	AC 13	1,20	0,36	0,41	0,45	0,49	0,61	0,74	0,84	89°	98°
AD 4	AC 13	1,56	0,45	0,52	0,57	0,62	0,78	0,93	1,06	99°	103°
AD 5	AC 13	2,00	0,55	0,62	0,69	0,75	0,94	1,13	1,29	102°	105°
AD 1	AC 23	0,80	0,28	0,32	0,35	0,38	0,48	0,57	0,65	66°	74°
AD 2	AC 23	1,02	0,37	0,43	0,47	0,51	0,64	0,77	0,88	83°	93°
AD 3	AC 23	1,20	0,44	0,51	0,56	0,61	0,76	0,92	1,04	84°	92°
AD 4	AC 23	1,56	0,56	0,64	0,71	0,77	0,97	1,16	1,32	92°	98°
AD 5	AC 23	2,00	0,72	0,82	0,91	0,99	1,24	1,49	1,70	96°	99°
AD 6	AC 23	2,40	0,85	0,97	1,07	1,16	1,46	1,75	2,00	99°	101°
AD 1	AC 25	0,80	0,41	0,46	0,51	0,55	0,70	0,84	0,95	50°	60°
AD 2	AC 25	1,02	0,59	0,67	0,74	0,80	1,01	1,21	1,38	57°	66°
AD 3	AC 25	1,20	0,72	0,81	0,90	0,98	1,23	1,48	1,68	63°	69°
AD 4	AC 25	1,56	1,02	1,16	1,28	1,39	1,75	2,10	2,39	75°	80°
AD 5	AC 25	2,00	1,41	1,60	1,77	1,92	2,42	2,90	3,30	77°	80°
AD 6	AC 25	2,40	1,73	1,97	2,18	2,37	2,98	3,57	4,07	82°	85°
AD 7	AC 25	2,80	2,07	2,36	2,61	2,83	3,57	4,28	4,87	88°	91°
AD 1	AC 45	0,80	0,48	0,55	0,61	0,66	0,83	1,00	1,14	32°	39°
AD 2	AC 45	1,02	0,73	0,83	0,92	1,00	1,26	1,51	1,72	46°	53°
AD 3	AC 45	1,20	0,92	1,05	1,16	1,26	1,58	1,90	2,16	48°	52°
AD 4	AC 45	1,56	1,35	1,54	1,70	1,85	2,32	2,79	3,17	59°	60°
AD 5	AC 45	2,00	1,92	2,19	2,42	2,63	3,31	3,97	4,52	68°	70°
AD 6	AC 45	2,40	2,46	2,79	3,09	3,35	4,22	5,07	5,77	72°	75°
AD 7	AC 45	2,80	3,01	3,43	3,79	4,11	5,18	6,21	7,07	79°	80°
AD 1	AC 46	0,80	0,55	0,62	0,69	0,75	0,94	1,13	1,29	23°	27°
AD 2	AC 46	1,02	0,92	1,05	1,16	1,26	1,58	1,90	2,16	26°	30°
AD 3	AC 46	1,20	1,20	1,37	1,51	1,64	2,06	2,48	2,82	30°	30°
AD 4	AC 46	1,56	2,03	2,32	2,56	2,78	3,50	4,20	4,78	35	35
AD 5	AC 46	2,00	3,11	3,54	3,91	4,24	5,34	6,41	7,30	40°	42°
AD 6	AC 46	2,40	4,12	4,69	5,18	5,62	7,08	8,49	9,67	45	46
AD 7	AC 46	3,23	5,49	6,40	7,10	7,84	10,16	12,43	14,33	55°	53°

APPLICATIONS

All types of treatments (herbicides, fungicides, insecticides ...)



3-20 bar



80°




Full cone

FULL CONE TABLE

	Orifice diameters	l / mn								Angles	
		3 bar	4 bar	5 bar	6 bar	10 bar	15 bar	20 bar	10 bar	20 bar	
AD 1	AC 31	0,80	0,53	0,61	0,67	0,73	0,92	1,10	1,25	39°	39°
AD 2	AC 31	1,02	0,82	0,93	1,03	1,12	1,41	1,69	1,92	87°	95°
AD 3	AC 31	1,20	0,87	0,99	1,10	1,19	1,50	1,80	2,05	65°	62°
AD 1	AC 35	0,80	0,53	0,61	0,67	0,73	0,92	1,10	1,25	34°	40°
AD 2	AC 35	1,02	0,92	1,05	1,16	1,26	1,58	1,90	2,16	39°	39°
AD 3	AC 35	1,20	1,28	1,46	1,61	1,75	2,20	2,64	3,00	44°	42°
AD 4	AC 35	1,56	2,08	2,37	2,62	2,84	3,58	4,30	4,89	77°	72°
AD 5	AC 35	2,00	2,62	2,98	3,30	3,58	4,51	5,41	6,16	37°	34°
AD 2	AC 56	1,02	0,88	1,00	1,11	1,20	1,52	1,82	2,07	21°	20°
AD 3	AC 56	1,20	1,19	1,36	1,50	1,63	2,05	2,46	2,80	28°	32°
AD 4	AC 56	1,56	2,05	2,33	2,58	2,8	3,52	4,23	4,81	35°	38°
AD 5	AC 56	2,00	3,46	3,94	4,36	4,73	5,96	7,15	8,14	43°	40°
AD 6	AC 56	2,10	5,11	5,82	6,43	6,98	8,78	10,54	12,00	56°	49°
AD 7	AC 56	2,30	6,87	7,81	8,64	9,38	11,80	14,17	16,12	68°	64°




Metering Disc **AMT**




APPLICATIONS
ALBUZ ceramic characteristics allow spraying high pressures while maintaining performance and precision. Exist in several dimensions: diameters 7, 15, 16 and 18mm.

REF	7010	7011	7012	7015	7018	7020	7023	15007	15008	15010	15012	15015	15018	15020	15023	15030	15040	15060	16008	16010	16012	16015	16016	16020	16023	16028	16032	16036	18008	18010	18012	18015	18018	18020	18023	
D (mm)	7	7	7	7	7	7	7	15	15	15	15	15	15	15	15	15	15	15	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16
d* (mm)	1,0	1,1	1,2	1,5	1,8	2,0	2,3	0,7	0,8	1,0	1,2	1,5	1,8	2,0	2,3	3,0	4,0	6,0	0,8	1,0	1,2	1,5	1,6	2,0	2,3	2,8	3,2	3,6	0,8	1,1	1,2	1,5	1,8	2,0	2,3	
e (mm)	3,1	3,1	3,1	3,1	3,1	3,1	3,1	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	

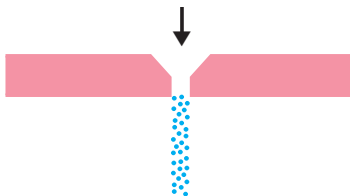

bar	Liters / mn								
	AMT ..007	AMT ..008	AMT ..010	AMT ..012	AMT ..015	AMT ..018	AMT ..020	AMT ..023	AMT ..040
2	0,42	0,54	0,91	1,14	1,88	2,54	3,09	3,98	12,28
3	0,51	0,66	1,10	1,39	2,27	3,12	3,77	4,91	15,06
4	0,59	0,75	1,25	1,60	2,60	3,60	4,35	5,70	17,40
5	0,65	0,83	1,38	1,78	2,89	4,03	4,86	6,40	19,46
10	0,91	1,15	1,89	2,51	3,99	5,70	6,85	9,17	27,56
15	1,10	1,39	2,27	3,06	4,82	6,98	8,37	11,31	33,78
20	1,27	1,59	2,59	3,52	5,51	8,06	9,65	13,13	39,03
30	1,54	1,92	3,11	4,30	6,65	9,88	11,80	16,20	47,84
50	1,96	2,43	3,91	5,52	8,44	12,76	15,20	21,12	61,83

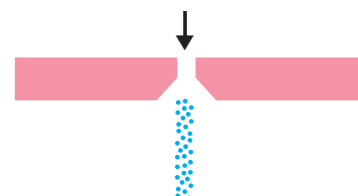

bar	Liters / mn								
	AMT ..007	AMT ..008	AMT ..010	AMT ..012	AMT ..015	AMT ..018	AMT ..020	AMT ..023	AMT ..040
2	0,41	0,43	0,65	0,94	1,42	1,98	2,46	3,18	10,13
3	0,50	0,53	0,79	1,15	1,73	2,42	3,02	3,90	12,41
4	0,57	0,61	0,91	1,32	2,00	2,80	3,50	4,50	14,33
5	0,64	0,68	1,01	1,47	2,23	3,13	3,92	5,03	16,03
10	0,89	0,95	1,42	2,07	3,15	4,43	5,58	7,12	22,68
15	1,08	1,16	1,74	2,53	3,85	5,42	6,87	8,72	27,79
20	1,24	1,34	2,00	2,92	4,44	6,26	7,95	10,07	32,09
30	1,50	1,63	2,44	3,56	5,43	7,67	9,78	12,33	39,32
50	1,92	2,09	3,13	4,58	6,99	9,90	12,68	15,92	50,79

Specific body dimensions: 11 mm

ISO



ISO colour code



OTHER SPRAYINGS

catalog 2025

ALBUZ

MSI Wide Angle Flat fan nozzle

MAIN CHARACTERISTICS

- > Thanks to the exceptional wear resistance of Albus pink ceramic, these nozzles can be used to spray suspension fertilizers.
- > Can be used on a sprayer boom (nozzle spacing : 1 m)
- > Flat jet (30° to 160° angle) providing coarse droplets without drift.
- > **Recommended pressure : 1 bar**

APPLICATIONS

For herbicide and liquid fertilizer applications

FLOW RATE CHART [l/min]

bar	PURPLE 025	BLUE 03	RED 04	BROWN 05	GREY 06	WHITE 08	LIGHT BLUE 10	LIGHT GREEN 15
0.5	0,41	0,49	0,65	0,82	0,98	1,31	1,63	2,45
1	0,58	0,69	0,92	1,15	1,39	1,85	2,31	3,46
1,5	0,71	0,85	1,13	1,41	1,70	2,26	2,83	4,24
2	0,82	0,98	1,31	1,63	1,96	2,61	3,27	4,90
2,5	0,91	1,10	1,46	1,83	2,19	2,92	3,65	5,48
3	1,00	1,20	1,60	2,00	2,40	3,20	4,00	6,00
3,5	1,08	1,3	1,73	2,16	2,59	3,46	4,32	6,48
4	1,15	1,39	1,85	2,31	2,77	3,7	4,62	6,93

ANGLE CHART

bar	PURPLE 025	BLUE 03	RED 04	BROWN 05	GREY 06	WHITE 08	LIGHT BLUE 10	LIGHT GREEN 15
1	96	96	96	104	108	117	133	150
1,5	103	103	104	110	114	122	140	154
2	107	108	111	114	118	127	142	156
3	112	113	116	116	124	132	144	160
4	116	116	121	122	128	135	147	162

FLOW RATE CHART [l/min]

Pressure (bar)	l/mn	Liters per hectare. Nozzle spacing : 100 cm									
		6 km/h	7 km/h	8 km/h	9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h	20 km/h
PURPLE 025											
0,5	0,41	41	35	31	27	25	21	18	15	14	12
1	0,58	58	50	44	39	35	29	25	22	19	17
1,5	0,71	71	61	53	47	43	36	30	27	24	21
2	0,82	82	70	62	55	49	41	35	31	27	25
2,5	0,91	91	78	68	61	55	46	39	34	30	27
3	1,00	100	86	75	67	60	50	43	38	33	30
3,5	1,08	108	93	81	72	65	54	46	41	36	32
4	1,15	115	99	86	77	69	58	49	43	38	35
BLUE 03											
0,5	0,49	49	42	37	33	29	25	21	18	16	15
1	0,69	69	59	52	46	41	35	30	26	23	21
1,5	0,85	85	73	64	57	51	43	36	32	28	26
2	0,98	98	84	74	65	59	49	42	37	33	29
2,5	1,10	110	94	83	73	66	55	47	41	37	33
3	1,20	120	103	90	80	72	60	51	45	40	36
3,5	1,30	130	111	98	87	78	65	56	49	43	39
4	1,39	139	119	104	93	83	70	60	52	46	42
RED 04											
0,5	0,65	65	56	49	43	39	33	28	24	22	20
1	0,92	92	79	69	61	55	46	39	35	31	28
1,5	1,13	113	97	85	75	68	57	48	42	38	34
2	1,31	131	112	98	87	79	66	56	49	44	39
2,5	1,46	146	125	110	97	88	73	63	55	49	44
3	1,60	160	137	120	107	96	80	69	60	53	48
3,5	1,73	173	148	130	115	104	87	74	65	58	52
4	1,85	185	159	139	123	111	93	79	69	62	56
BROWN 05											
0,5	0,82	82	70	62	55	49	41	35	31	27	25
1	1,15	115	99	86	77	69	58	49	43	38	35
1,5	1,41	141	121	106	94	85	71	60	53	47	42
2	1,63	163	140	122	109	98	82	70	61	54	49
2,5	1,83	183	157	137	122	110	92	78	69	61	55
3	2,00	200	171	150	133	120	100	86	75	67	60
3,5	2,16	216	185	162	144	130	108	93	81	72	65
4	2,31	231	198	173	154	139	116	99	87	77	69
GREY 06											
0,5	0,98	98	84	74	65	59	49	42	37	33	29
1	1,39	139	119	104	93	83	70	60	52	46	42
1,5	1,70	170	146	128	113	102	85	73	64	57	51
2	1,96	196	168	147	131	118	98	84	74	65	59
2,5	2,19	219	188	164	146	131	110	94	82	73	66
3	2,40	240	206	180	160	144	120	103	90	80	72
3,5	2,59	259	222	194	173	155	130	111	97	86	78
4	2,77	277	237	208	185	166	139	119	104	92	83
WHITE 08											
0,5	1,31	131	112	98	87	79	66	56	49	44	39
1	1,85	185	159	139	123	111	93	79	69	62	56
1,5	2,26	226	194	170	151	136	113	97	85	75	68
2	2,61	261	224	196	174	157	131	112	98	87	78
2,5	2,92	292	250	219	195	175	146	125	110	97	88
3	3,20	320	274	240	213	192	160	137	120	107	96
3,5	3,46	346	297	260	231	208	173	148	130	115	104
4	3,70	370	317	278	247	222	185	159	139	123	111
LIGHT BLUE 10											
0,5	1,63	163	140	122	109	98	82	70	61	54	49
1	2,31	231	198	173	154	139	116	99	87	77	69
1,5	2,83	283	243	212	189	170	142	121	106	94	85
2	3,27	327	280	245	218	196	164	140	123	109	98
2,5	3,65	365	313	274	243	219	183	156	137	122	110
3	4,00	400	343	300	267	240	200	171	150	133	120
3,5	4,32	432	370	324	288	259	216	185	162	144	130
4	4,62	462	396	347	308	277	231	198	173	154	139
LIGHT GREEN 15											
0,5	2,45	245	210	184	163	147	123	105	92	82	74
1	3,46	346	297	260	231	208	173	148	130	115	104
1,5	4,24	424	363	318	283	254	212	182	159	141	127
2	4,90	490	420	368	327	294	245	210	184	163	147
2,5	5,48	548	470	411	365	329	274	235	206	183	164
3	6,00	600	514	450	400	360	300	257	225	200	180
3,5	6,48	648	555	486	432	389	324	278	243	216	194
4	6,93	693	594	520	462	416	347	297	260	231	208



0,5-4 bar



130°-160°



OTHER SPRAYINGS



ALBUZ catalog 2025

Specific body dimensions: 11 mm

ISO

Air induction Wide Angle Flat fan nozzle

MVI



ISO colour code

SPECIFIC CHARACTERISTICS

- › Air-induction fan nozzle (venturi system): sprays large drops filled with air bubbles, which do not drift and produce fine droplets on contact with the plant.
- › Almost totally eliminate drift, while increasing the number of impacts (excellent coverage of the treated zone).
- › Anti-clogging design and double air-intake orifice.
- › Easy dismantling for a good cleaning.
- › **Recommended pressure: 1,5 bar.**
- › Use 100 mesh nozzle filters for models 80 015 and 80 02.

MAIN CHARACTERISTICS

- › Pink ALBUZ® ceramic orifice (excellent precision and high wear resistance).
- › Flat fan pattern angle 130° to 160°.
- › Big droplets with uniform distribution.
- › Designed for all types of nozzles-holders, using the same cap as ALBUZ® APM nozzles.
- › Full range with 10 models on ISO flow-rates.

FLOW RATE CHART (l/min)

Colour	Pressure (bar)	l/mn	Liters per hectare. Nozzle spacing : 100 cm									
			6 km/h	7 km/h	8 km/h	9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h	20 km/h
GREEN 015	1,5	0,43	43	37	32	29	26	22	18	16	14	13
	2	0,49	49	42	37	33	29	25	21	18	16	15
	2,5	0,55	55	47	41	37	33	28	24	21	18	17
	3	0,60	60	51	45	40	36	30	26	23	20	18
	3,5	0,65	65	56	49	43	39	33	28	24	22	20
YELLOW 02	1,5	0,57	57	49	43	38	34	29	24	21	19	17
	2	0,66	66	57	50	44	40	33	28	25	22	20
	2,5	0,73	73	63	55	49	44	37	31	27	24	22
	3	0,80	80	69	60	53	48	40	34	30	27	24
	3,5	0,86	86	74	65	57	52	43	37	32	29	26
PURPLE 025	1,5	0,72	72	62	54	48	43	36	31	27	24	22
	2	0,82	82	70	62	55	49	41	35	31	27	25
	2,5	0,92	92	79	69	61	55	46	39	35	31	28
	3	1,00	100	86	75	67	60	50	43	38	33	30
	3,5	1,08	108	93	81	72	65	54	46	41	36	32
BLUE 03	1,5	0,86	86	74	65	57	52	43	37	32	29	26
	2	0,99	99	85	74	66	59	50	42	37	33	30
	2,5	1,10	110	94	83	73	66	55	47	41	37	33
	3	1,20	120	103	90	80	72	60	51	45	40	36
	3,5	1,29	129	111	97	86	77	65	55	48	43	39
RED 04	1,5	1,15	115	99	86	77	69	58	49	43	38	35
	2	1,32	132	113	99	88	79	66	57	50	44	40
	2,5	1,47	147	126	110	98	88	74	63	55	49	44
	3	1,60	160	137	120	107	96	80	69	60	53	48
	3,5	1,72	172	147	129	115	103	86	74	65	57	52
BROWN 05	1,5	1,43	143	123	107	95	86	72	61	54	48	43
	2	1,65	165	141	124	110	99	83	71	62	55	50
	2,5	1,83	183	157	137	122	110	92	78	69	61	55
	3	2,00	200	171	150	133	120	100	86	75	67	60
	3,5	2,15	215	184	161	143	129	108	92	81	72	65
GREY 06	1,5	1,72	172	147	129	115	103	86	74	65	57	52
	2	1,98	198	170	149	132	119	99	85	74	66	59
	2,5	2,20	220	189	165	147	132	110	94	83	73	66
	3	2,40	240	206	180	160	144	120	103	90	80	72
	3,5	2,58	258	221	194	172	155	129	111	97	86	77
WHITE 08	1,5	2,29	229	196	172	153	137	115	98	86	76	69
	2	2,63	263	225	197	175	158	132	113	99	88	79
	2,5	2,93	293	251	220	195	176	147	126	110	98	88
	3	3,20	320	274	240	213	192	160	137	120	107	96
	3,5	3,45	345	296	259	230	207	173	148	129	115	104
LIGHT BLUE 10	1,5	2,87	287	246	215	191	172	144	123	108	96	86
	2	3,29	329	282	247	219	197	165	141	123	110	99
	2,5	3,66	366	314	275	244	220	183	157	137	122	110
	3	4,00	400	343	300	267	240	200	171	150	133	120
	3,5	4,31	431	369	323	287	259	216	185	162	144	129

FLOW RATE CHART (l/min)

bar	GREEN 015	YELLOW 02	PURPLE 025	BLUE 03	RED 04	BROWN 05	GREY 06	WHITE 08	LIGHT BLUE 10
1,5	0,43	0,57	0,72	0,86	1,15	1,43	1,72	2,29	2,87
2	0,49	0,66	0,82	0,99	1,32	1,65	1,98	2,63	3,29
2,5	0,55	0,73	0,92	1,10	1,47	1,83	2,20	2,93	3,66
3	0,6	0,8	1,00	1,20	1,60	2,00	2,40	3,20	4,00
3,5	0,65	0,86	1,08	1,29	1,72	2,15	2,58	3,45	4,31
4	0,69	0,92	1,15	1,38	1,84	2,3	2,76	3,67	4,59

ANGLE CHART

bar	1,5	2	3
GREEN 015	130°	135°	140°
YELLOW 02	130°	140°	145°
PURPLE 025	135°	145°	150°
BLUE 03	135°	140°	150°
RED 04	140°	150°	155°
BROWN 05	140°	150°	155°
GREY 06	140°	150°	155°
WHITE 08	145°	150°	155°
LIGHT BLUE 10	145°	155°	160°

APPLICATIONS

All types of treatment (systemic and contact products) including liquid fertilizers.



1,5-4 bar



130°-160°



ISO

Specific body dimensions: 11 mm



ISO colour code

ESI

6 streams Fertilizer nozzle



OTHER SPRAYINGS

ALBUZ

catalog 2025

MAIN CHARACTERISTICS

- > Pink ALBUZ® ceramic calibrated orifice (excellent precision and high wear resistance),
- > ISO colour coded and flow rated but with an ALBUZ® 11 mm plastic body shape. Cap fitted with 7° to 10° offset angle from boom position
- > Orifices: 6 streams providing very coarse droplets improving fertilizer distribution.

RECOMMENDATIONS

- > The recommended boom height is 60 cm (23.6 inches) from the target; that is similar to the ISO 110° flat-fan nozzle height recommendations.
- > Recommended pressure : 1.5 bar

APPLICATIONS

liquid fertilizer application

Spraying products with a density different than water

Flow rates and volume per hectare given in this catalogue are for a liquid with a density equal to 1 (water). When spraying a liquid fertilizer with a density different from 1, it is needed to apply a conversion factor in order to determine which nozzle will have the required flow rate.


Example:
To apply a rate of 220 l of liquid fertilizer, with a density of 1.28, the conversion factor is 113 as showed in the formula below.

$$220 \text{ l (liquid fertilizer)} \times 1.13 = 248.6 \text{ l (water)}$$

This is matching with the ESI Grey 06 at 10 km/h at 2 bars or ESI Grey 06 at 9 km/h at 1.5 bars. As well as the ESI 05 Brown at 9 km/h at 2.5 bars. You'll find the different conversion factors to apply according to different densities in the adjacent table



1-4 bar



FLOW RATE CHART [l/min]

Colour	Pressure (bar)	l/mn	Liters per hectare. Nozzle spacing : 50 cm									
			6 km/h	7 km/h	8 km/h	9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h	20 km/h
GREEN 01S	1	0,37	74	63	56	49	44	37	32	28	25	22
	1,5	0,44	88	75	66	59	53	44	38	33	29	26
	2	0,50	100	86	75	67	60	50	43	38	33	30
	2,5	0,55	110	94	83	73	66	55	47	41	37	33
	3	0,60	120	103	90	80	72	60	51	45	40	36
	3,5	0,64	128	110	96	85	77	64	55	48	43	38
YELLOW 02	4	0,68	136	117	102	91	82	68	58	51	45	41
	1	0,52	104	89	78	69	62	52	45	39	35	31
	1,5	0,61	122	105	92	81	73	61	52	46	41	37
	2	0,68	136	117	102	91	82	68	58	51	45	41
	2,5	0,74	148	127	111	99	89	74	63	56	49	44
	3	0,80	160	137	120	107	96	80	69	60	53	48
PURPLE 02S	3,5	0,85	170	146	128	113	102	85	73	64	57	51
	4	0,90	180	154	135	120	108	90	77	68	60	54
	1	0,64	128	110	96	85	77	64	55	48	43	38
	1,5	0,76	152	130	114	101	91	76	65	57	51	46
	2	0,85	170	146	128	113	102	85	73	64	57	51
	2,5	0,93	186	159	140	124	112	93	80	70	62	56
BLUE 03	3	1,00	200	171	150	133	120	100	86	75	67	60
	3,5	1,06	212	182	159	141	127	106	91	80	71	64
	4	1,12	224	192	168	149	134	112	96	84	75	67
	1	0,77	154	132	116	103	92	77	66	58	51	46
	1,5	0,91	182	156	137	121	109	91	78	68	61	55
	2	1,02	204	175	153	136	122	102	87	77	68	61
RED 04	2,5	1,12	224	192	168	149	134	112	96	84	75	67
	3	1,20	240	206	180	160	144	120	103	90	80	72
	3,5	1,28	256	219	192	171	154	128	110	96	85	77
	4	1,35	270	231	203	180	162	135	116	101	90	81
	1	1,03	206	177	155	137	124	103	88	77	69	62
	1,5	1,21	242	207	182	161	145	121	104	91	81	73
BROWN 05	2	1,36	272	233	204	181	163	136	117	102	91	82
	2,5	1,49	298	255	224	199	179	149	128	112	99	89
	3	1,60	320	274	240	213	192	160	137	120	107	96
	3,5	1,70	340	291	255	227	204	170	146	128	113	102
	4	1,80	360	309	270	240	216	180	154	135	120	108
	1	1,35	270	231	203	180	162	135	116	101	90	81
GREY 06	1,5	1,56	312	267	234	208	187	156	134	117	104	94
	2	1,73	346	297	260	231	208	173	148	130	115	104
	2,5	1,87	374	321	281	249	224	187	160	140	125	112
	3	2,00	400	343	300	267	240	200	171	150	133	120
	3,5	2,11	422	362	317	281	253	211	181	158	141	127
	4	2,22	444	381	333	296	266	222	190	167	148	133
OTHER	1	1,62	324	278	243	216	194	162	139	122	108	97
	1,5	1,87	374	321	281	249	224	187	160	140	125	112
	2	2,07	414	355	311	276	248	207	177	155	138	124
	2,5	2,25	450	386	338	300	270	225	193	169	150	135
	3	2,40	480	411	360	320	288	240	206	180	160	144
	3,5	2,54	508	435	381	339	305	254	218	191	169	152
4	2,66	532	456	399	355	319	266	228	200	177	160	

Density - kg/l	Conversion factors
1,00 - WATER	1,00
1,08	1,04
1,20	1,10
1,28 - NITROGEN	1,13

OTHER
SPRAYINGS



ALBUZ catalog 2025

ISO

6 streams compact cap
fertilizer nozzle

FESI



ISO colour code

RECOMMENDATIONS

- > The recommended boom height is 60 cm (23.6 inches) from the target; that is similar to the 110° flat fan nozzle (AXI / ADI/AVI).
- > **Recommended pressure : 1.5 bar**

MAIN CHARACTERISTICS

- > Pink AlbuZ ceramic calibrated orifice (excellent precision and high wear resistance)
- > ISO colour coded and flow rated.
- > Orifices : 6 streams providing very coarse droplets improving fertilizer distribution

FLOW RATE CHART (l/min)

Colour	Pressure (bar)	l/mn	Liters per hectare. Nozzle spacing : 50 cm									
			6 km/h	7 km/h	8 km/h	9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h	20 km/h
BROWN 05	1	1,35	270	231	203	180	162	135	116	101	90	81
	1,5	1,56	312	267	234	208	187	156	134	117	104	94
	2	1,73	346	297	260	231	208	173	148	130	115	104
	2,5	1,87	374	321	281	249	224	187	160	140	125	112
	3	2,00	400	343	300	267	240	200	171	150	133	120
GREY 06	3,5	2,11	422	362	317	281	253	211	181	158	141	127
	4	2,22	444	381	333	296	266	222	190	167	148	133
	1	1,62	324	278	243	216	194	162	139	122	108	97
	1,5	1,87	374	321	281	249	224	187	160	140	125	112
	2	2,07	414	355	311	276	248	207	177	155	138	124
WHITE 08	2,5	2,25	450	386	338	300	270	225	193	169	150	135
	3	2,40	480	411	360	320	288	240	206	180	160	144
	3,5	2,54	508	435	381	339	305	254	218	191	169	152
	4	2,66	532	456	399	355	319	266	228	200	177	160
	1	1,91	382	327	287	255	229	191	164	143	127	115
LIGHT BLUE 10	1,5	2,31	462	396	347	308	277	231	198	173	154	139
	2	2,54	528	453	396	352	317	264	226	198	176	158
	2,5	2,94	588	504	441	392	353	294	252	221	196	176
	3	3,20	640	549	480	427	384	320	274	240	213	192
	3,5	3,44	688	590	516	459	413	344	295	258	229	206
LIGHT GREEN 15	4	3,66	732	627	549	488	439	366	314	275	244	220
	1	2,39	478	410	359	319	287	239	205	179	159	143
	1,5	2,89	578	495	434	385	347	289	248	217	193	173
	2	3,31	662	567	497	441	397	331	284	248	221	199
	2,5	3,67	734	629	551	489	440	367	315	275	245	220
LIGHT GREEN 15	3	4,00	800	686	600	533	480	400	343	300	267	240
	3,5	4,30	860	737	645	573	516	430	369	323	287	258
	4	4,58	916	785	687	611	550	458	393	344	305	275
	1	3,58	716	614	537	477	430	358	307	269	239	215
	1,5	4,33	866	742	650	577	520	433	371	325	289	260
LIGHT GREEN 15	2	4,96	992	850	744	661	595	496	425	372	331	298
	2,5	5,51	1102	945	827	735	661	551	472	413	367	331
	3	6,00	1200	1029	900	800	720	600	514	450	400	360
	3,5	6,45	1290	1106	968	860	774	645	553	484	430	387
	4	6,87	1374	1178	1031	916	824	687	589	515	458	412

Spraying products with a density different than water

Flow rates and volume per hectare given in this catalogue are for a liquid with a density equal to 1 (water). When spraying a liquid fertilizer with a density different from 1, it is needed to apply a conversion factor in order to determine which nozzle will have the required flow rate.

Example:

To apply a rate of 310 l of liquid fertilizer, with a density of 1.28, the conversion factor is 1.13 as showed in the formula below.

$$310 \text{ l (liquid fertilizer)} \times 1.13 = 350.3 \text{ l (water)}$$

This is matching with the FESI White 08 at 9 km/h at 2 bars or FESI Light Blue 10 at 14 km/h at 3 bars.

You'll find the different conversion factors to apply according to different densities in the adjacent table


Density - kg/l	Conversion factors
1,00 - WATER	1,00
1,08	1,04
1,20	1,10
1,28 - NITROGEN	1,13

APPLICATIONS

liquid fertilizer application



1-4 bar



ISO

Specific body dimensions: 8 mm



ISO colour code

OCI Off center flat fan nozzle



OTHER SPRAYINGS

catalog 2025

ALBUZ

MAIN CHARACTERISTICS

- > Pink ALBUZ® ceramic orifice (excellent precision and high wear resistance).
- > Flat fan pattern angle 80°.
- > Improves applications near sensitive areas: water courses, field edges... (see graphs below).
- > Designed for all types of nozzle holders, using the same cap as ALBUZ® APE nozzles.
- > All types of treatments (pesticides, insecticides, herbicides, etc)
- > **Recommended pressure: 2 bar.**

APPLICATIONS

All types of treatments (systemic and contact products) including fertilizers.



2-4 bar



FLOW RATE CHART

Colour	ISO code	#	(bar)	l/mn	Liters / hectare - Nozzle spacing: 50 cm											
					4 km/h	5 km/h	6 km/h	7 km/h	8 km/h	9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18km/h	20km/h
YELLOW	OCI 8002	100 Mesh	2	0,65	195	156	130	111	98	87	78	65	56	49	43	39
			3	0,80	240	192	160	137	120	107	96	80	69	60	53	48
			4	0,91	273	218	182	156	137	121	109	91	78	68	61	55
BLUE	OCI 8003	50 Mesh	2	0,98	294	235	196	168	147	131	118	98	84	74	65	59
			3	1,20	360	288	240	206	180	160	144	120	103	90	80	72
			4	1,39	417	334	278	238	209	185	167	139	119	104	93	83
RED	OCI 8004	50 Mesh	2	1,31	393	314	262	225	197	175	157	131	112	98	87	79
			3	1,60	480	384	320	274	240	213	192	160	137	120	107	96
			4	1,85	555	444	370	317	278	247	222	185	159	139	123	111

TREATMENT ON PLANTS




OCI 80 03


30 cm

TREATMENT ON BOOM

Standard

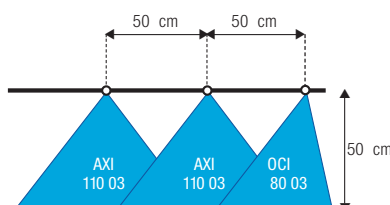

Optimum

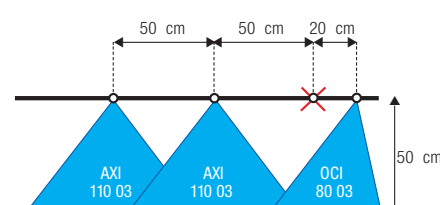

OTHER SPRAYINGS



ALBUZ catalog 2025

Compact Air induction
off center flat fan nozzle

CVI-OC

Specific body d
imensions: 8 mm

ISO



ISO colour code

SPECIFIC CHARACTERISTICS

- > Air Induction fan nozzles (Venturi system): spray large drops filled with air bubbles, which do not drift and produce fine droplets in contact with the plant.
- > Almost totally eliminate drift, while increasing the number of impacts (excellent coverage of treated zone)
- > Improve applications near sensitive areas when used on boom end (see picture 1)
- > Optimize quality application when used on boom end - 20 cm (see picture 2)
- > **Recommended pressure : 2 bar**

MAIN CHARACTERISTICS

- > Designed to be used over a wide range of pressures (from 1.5 bar to 3 bar)
- > Pink Albus ceramic orifice (excellent precision and high wear resistance)
- > Flat fan pattern , 80° spray angle
- > Designed for all types of nozzle holders using the same cap as AXI nozzle.

FLOW RATE CHART

Colour	ISO code	Mesh	(bar)	Drop	l / mn	Liters / hectare - Nozzle spacing: 50 cm									
						9 km / h	10 km / h	12 km / h	14 km / h	16 km / h	18 km / h	20 km / h	22 km / h	24 km / h	26 km / h
YELLOW	CVI 80 02	100	1,5	TG	0,57	76	68	57	49	43	38	34	31	29	26
			2	TG	0,66	88	79	66	57	50	44	44	35	33	30
			2,5	TG	0,73	97	88	73	63	55	49	48	40	37	34
			3	G	0,80	107	96	80	69	60	53	52	44	40	37
PURPLE	CVI 80 025	50	1,5	TG	0,71	95	85	71	61	53	47	35	39	36	33
			2	TG	0,82	109	98	82	70	62	55	49	45	41	38
			2,5	G	0,91	121	109	91	78	68	61	55	50	46	42
			3	G	1,00	133	120	100	86	75	67	60	55	50	46
BLUE	CVI 80 03	50	1,5	TG	0,85	113	102	85	73	64	57	51	46	43	39
			2	TG	0,98	131	118	98	84	74	65	66	53	49	45
			2,5	G	1,10	147	132	110	94	83	73	72	60	55	51
			3	G	1,20	160	144	120	103	90	80	78	65	60	55

APPLICATIONS

All types of treatments (systemic and contact products) including fertilizers.




2-4 bar




TREATMENT ON BOOM

Standard

Optimum

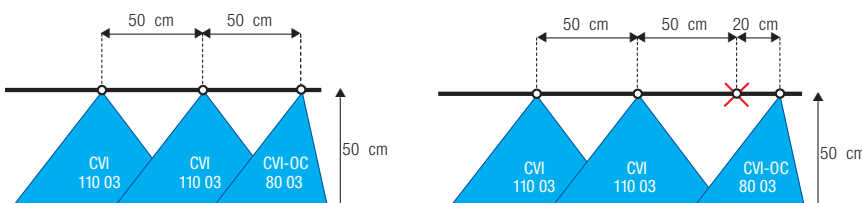

TREATMENT ON PLANTS

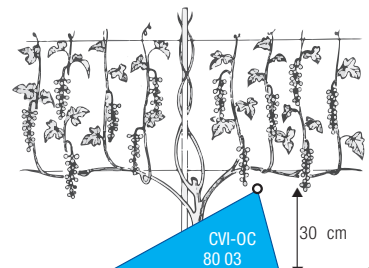



European Colour code



EXA 3 streams Fertilizer nozzle

MAIN CHARACTERISTICS

- > Liquid fertilizer application.
- > 3-stream orifices providing very coarse droplets.
- > Boom height and the corresponding pressure provide a consistent distribution of the fertilizer.
- > **Recommended pressure: 1 bar**

APPLICATIONS

Liquid fertilizer application

Spraying products with a density different than water


Flow rates and volume per hectare given in this catalogue are for a liquid with a density equal to 1 (water). When spraying a liquid fertilizer with a density different from 1, it is needed to apply a conversion factor in order to determine which nozzle will have the required flow rate.

Example:
To apply a rate of 220 l of liquid fertilizer, with a density of 1.28, the conversion factor is 1.13 as showed in the formula below.

220 l (liquid fertilizer) x 1.13 = 248.6 l (water).
This is matching with the EXA White at 8 km/h at 1.5 bars or EXA Brown at 14 km/h at 3 bars.



1-3,5 bar



You'll find the different conversion factors to apply according to different densities in the adjacent table

FLOW RATE CHART

Colour	Pressure (bar)	l/mn	Liters / hectare - Nozzle spacing : 50 cm									
			6 km/h	7 km/h	8 km/h	9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h	20 km/h
YELLOW	1	0,35	70	60	53	47	42	35	30	26	23	21
	1,5	0,43	86	74	65	57	52	43	37	32	29	26
	2	0,50	100	86	75	67	60	50	43	38	33	30
	2,5	0,56	112	96	84	75	67	56	48	42	37	34
	3	0,61	122	105	92	81	73	61	52	46	41	37
3,5	0,66	132	113	99	88	79	66	57	50	44	40	
RED	1	0,59	118	101	89	79	71	59	51	44	39	35
	1,5	0,71	142	122	107	95	85	71	61	53	47	43
	2	0,80	160	137	120	107	96	80	69	60	53	48
	2,5	0,89	178	153	134	119	107	89	76	67	59	53
	3	0,97	194	166	146	129	116	97	83	73	65	58
3,5	1,04	208	178	156	139	125	104	89	78	69	62	
GREEN	1	0,67	134	115	101	89	80	67	57	50	45	40
	1,5	0,81	162	139	122	108	97	81	69	61	54	49
	2	0,92	184	158	138	123	110	92	79	69	61	55
	2,5	1,01	202	173	152	135	121	101	87	76	67	61
	3	1,10	220	189	165	147	132	110	94	83	73	66
3,5	1,18	236	202	177	157	142	118	101	89	79	71	
BLUE	1	0,86	172	147	129	115	103	86	74	65	57	52
	1,5	1,03	206	177	155	137	124	103	88	77	69	62
	2	1,17	234	201	176	156	140	117	100	88	78	70
	2,5	1,29	258	221	194	172	155	129	111	97	86	77
	3	1,40	280	240	210	187	168	140	120	105	93	84
3,5	1,50	300	257	225	200	180	150	129	113	100	90	
WHITE	1	1,39	278	238	209	185	167	139	119	104	93	83
	1,5	1,63	326	279	245	217	196	163	140	122	109	98
	2	1,83	366	314	275	244	220	183	157	137	122	110
	2,5	2,00	400	343	300	267	240	200	171	150	133	120
	3	2,15	430	369	323	287	258	215	184	161	143	129
3,5	2,29	458	393	344	305	275	229	196	172	153	137	
BROWN	1	1,90	380	326	285	253	228	190	163	143	127	114
	1,5	2,24	448	384	336	299	269	224	192	168	149	134
	2	2,51	502	430	377	335	301	251	215	188	167	151
	2,5	2,74	548	470	411	365	329	274	235	206	183	164
	3	2,95	590	506	443	393	354	295	253	221	197	177
3,5	3,14	628	538	471	419	377	314	269	236	209	188	
grey	1	2,25	450	386	338	300	270	225	193	169	150	135
	1,5	2,63	526	451	395	351	316	263	225	197	175	158
	2	2,95	590	506	443	393	354	295	253	221	197	177
	2,5	3,21	642	550	482	428	385	321	275	241	214	193
	3	3,45	690	591	518	460	414	345	296	259	230	207
3,5	3,68	736	631	552	491	442	368	315	276	245	221	
BLACK	1	3	600	514	450	400	360	300	257	225	200	180
	1,5	3,51	702	602	527	468	421	351	301	263	234	211
	2	3,93	786	674	590	524	472	393	337	295	262	236
	2,5	4,28	856	734	642	571	514	428	367	321	285	257
	3	4,60	920	789	690	613	552	460	394	345	307	276
3,5	4,89	978	838	734	652	587	489	419	367	326	293	

Density - kg/l	Conversion factors
1,00 - WATER	1,00
1,08	1,04
1,20	1,10
1,28 - NITROGEN	1,13

OTHER SPRAYINGS



ALBUZ catalog 2025

Air induction flat fan nozzle off center

AVI-OC

Specific body dimensions: 11 mm

ISO



ISO colour code

SPECIFIC CHARACTERISTICS

- > Air induction fan nozzles (Venturi system): spray large drops filled with air bubbles, which do not drift and produce fine droplets in contact with the plant.
- > Almost totally eliminate drift, while increasing the number of impacts (excellent coverage of the treated zone).
- > Improve applications near sensitive areas when used on boom end (see picture 1 and picture 2 below).
- > **Recommended pressure: 3 bar.**

MAIN CHARACTERISTICS

- > **Designed to be used over a wide range of pressures (from 3 to 5 bar).**
- > Pink ALBUZ® ceramic orifice (excellent precision and high wear resistance).
- > Flat fan pattern, 80° spray angle.
- > Designed for all types of nozzle holders, using the same cap as ALBUZ® APE nozzles

FLOW RATE CHART

Colour	ISO code	Mesh	(bar)	l/mn	Liters / hectare - Nozzle spacing : 50 cm												
					4 km/h	5 km/h	6 km/h	7 km/h	8 km/h	9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18km/h	20km/h	
ORANGE	AVI-OC 8001	100	3	0,40	120	96	80	69	60	53	48	40	34	30	27	24	
			4	0,46	138	110	92	79	69	61	55	46	39	35	31	28	
			5	0,52	156	125	104	89	78	69	62	52	45	39	35	31	
GREEN	AVI-OC 80015	100	3	0,60	180	144	120	103	90	80	72	60	51	45	40	36	
			4	0,69	207	166	138	118	104	92	83	69	59	52	46	41	
			5	0,77	231	185	154	132	116	103	92	77	66	58	51	46	
YELLOW	AVI-OC 8002	100	3	0,80	240	192	160	137	120	107	96	80	69	60	53	48	
			4	0,91	273	218	182	156	137	121	109	91	78	68	61	55	
			5	1,03	309	247	206	177	155	137	124	103	88	77	69	62	
PURPLE	AVI-OC 80025	50	3	1,00	300	240	200	171	150	133	120	100	86	75	67	60	
			4	1,15	345	276	230	197	173	153	138	115	99	86	77	69	
			5	1,29	387	310	258	221	194	172	155	129	111	97	86	77	
BLUE	AVI-OC 8003	50	3	1,20	360	288	240	206	180	160	144	120	103	90	80	72	
			4	1,39	417	334	278	238	209	185	167	139	119	104	93	83	
			5	1,55	465	372	310	266	233	207	186	155	133	116	103	93	
RED	AVI-OC 8004	50	3	1,60	480	384	320	274	240	213	192	160	137	120	107	96	
			4	1,85	555	444	370	317	278	247	222	185	159	139	123	111	
			5	2,07	621	497	414	355	311	276	248	207	177	155	138	124	
BROWN	AVI-OC 8005	50	3	2,00	600	480	400	343	300	267	240	200	171	150	133	120	
			4	2,31	693	554	462	396	347	308	277	231	198	173	154	139	
			5	2,58	774	619	516	442	387	344	310	258	221	194	172	155	

APPLICATIONS

All types of treatments (systemic and contact products) including fertilizers.




3-5 bar




TREATMENT ON BOOM

Standard

Optimum

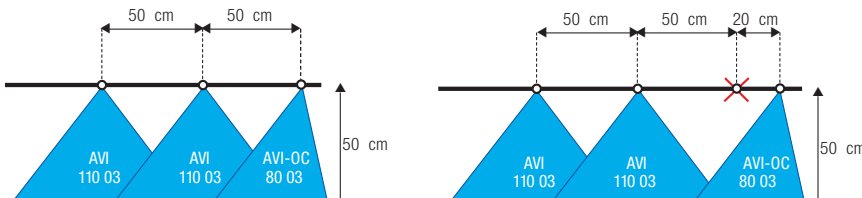

TREATMENT ON PLANTS

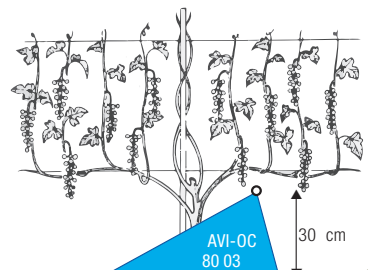



ALBUZ

catalog 2025


FILTERS

FILTERS PROTECT

A clogged or partially clogged nozzle will be less efficient in spraying your treatments, because it changes the nozzle flowrate and spray pattern. Please ensure that you select the correct filter to use with the specific nozzles you are using, as per our recommendations.

FILTER CHOICE

There are various models of filters. You will find information in the chart to help you to choose the correct filter.

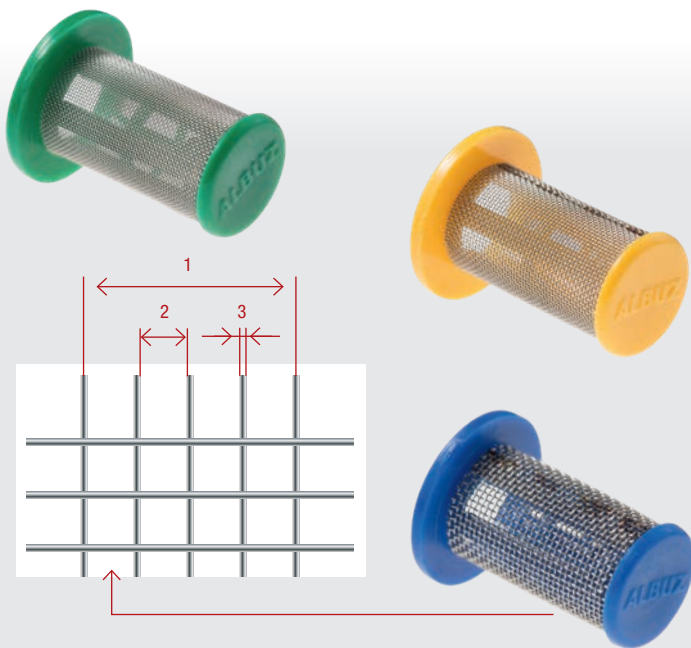

Presentation of filter models according to ISO 19 732 standard		
Colour	Number of wires per inch* (1)	spacing between wires (2) X Diameter of wire (mesh) (3)
Red	25/30	0,45 x 0,32 - 0,63 x 0,16
Blue	50/60	0,28 x 0,22 - 0,35 x 0,18
Yellow	80	0,18 x 0,14 - 0,23 x 0,10
Green	100	0,14 x 0,11 - 0,18 x 0,08
Pink	200	0,07 x 0,06 - 0,08 x 0,05





Various components

Find our range on www.albuz-spray.com

NOZZLE BLISTER PACKAGING

This packaging has been especially designed for self-service. Nozzles

are packed in blisters of 8 pieces except for AVI-OC models and OCI (2 nozzles per blister). On the back of the cardboard label you will find the flow rate chart.



NOZZLE CLEANING BRUSH

THE MAINTENANCE OF YOUR NOZZLES IS ESSENTIAL. WHILE PROTECTING YOUR NOZZLES, YOU SAVE MONEY AND TIME.

WINTERIZING

Do not forget to clean your nozzles before winter.

UNCLOGGING

Remove the nozzles from the nozzle holder and brush them with our ALBUZ® nozzle cleaning brush (important: do not use metal materials such as a knife or wire, it would damage the nozzle).

CLEANING

Blow compressed air into the nozzle (do not blow with your mouth). Rinse the nozzles using a descaling agent (e.g. Antikal).


After cleaning, ALBUZ® nozzles will be in perfect condition for the next use.



WATER SENSITIVE PAPER

The special coating of hydro sensitive papers will enable you to evaluate spray coverage and the density of droplets. You can then check the spraying quality of your nozzles.

Water sensitive paper		
Reference	Paper size	Quantity per pack
039 547	76 mm x 26 mm	50 cards
039 548	76 mm x 52 mm	50 cards

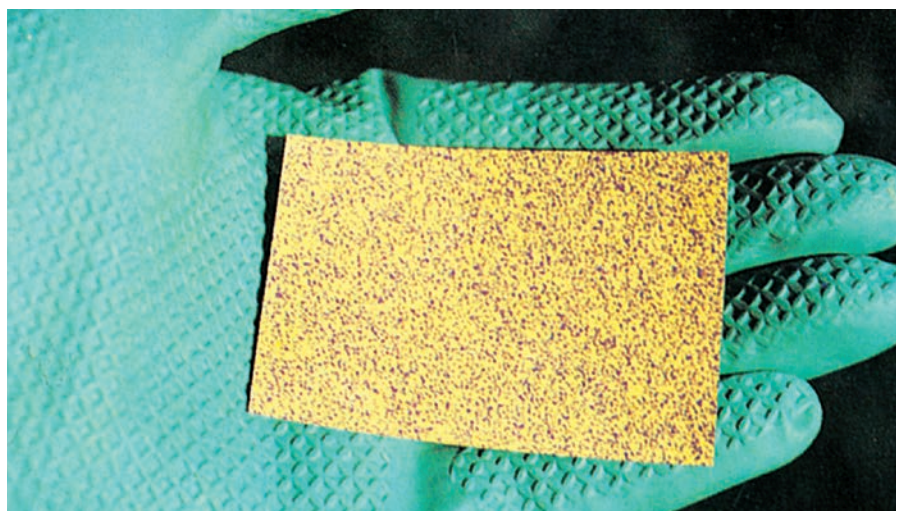






PRECISION - RESISTANCE - EFFICACY - LONGEVITY



www.albuz-spray.com

Just as an information, the chart below is giving an overview of the Albuz nozzle homologation for drift reduction in France. Information are not contractual and subject to change without prior notice.

Antidérive		66%	75%	90%
	015	✓		
	02	✓		
	025	✓		
	03	✓	✓	
	04	✓	✓	
AVI 110	05	✓		
	015	✓	✓	
	02	✓	✓	✓
	025	✓	✓	✓
	03	✓	✓	✓
	04	✓	✓	✓
AVI UC 110	05	✓	✓	✓

Antidérive		66%	75%	90%
	02	✓		
	025	✓		
	03	✓		
	04	✓	✓	
AVI TWIN 110	05	✓		
	02	✓		
	025	✓		
	03	✓		
	04	✓		
CVI 110	05	✓		
	025	✓	✓	
	03	✓	✓	✓
	04	✓	✓	✓
CVI TWIN 110	05	✓	✓	✓

For drift reduction homologation in other countries, please refer to each country's specific regulation

FAXI FAST CAP AXI

SPECIFIC CHARACTERISTICS

- > Adapted to ISO color code.
- > Sold with EPDM flat gasket



FAST-CAP
AXI 110°
[015, 02, 025,
03, 04, 05 and 06 sizes]



FAST-CAP
AXI 80°
[015, 02, 025,
03, 04 and 05 sizes]

FAVI FAST CAP AVI



FAST-CAP
AVI-UC
[all sizes]



FAST-CAP
AVI-TWIN
[all sizes]



FAST-CAP
**AVI 80°
et 110°**
[all sizes]



FAST-CAP
AVI-OC
[all sizes]

SPECIFIC CHARACTERISTICS

- > Adapted to ISO color code.
- > The nozzle can be removed from the FAST-CAP for an easy and quick cleaning
- > Sold with EPDM flat gasket

APPLICATIONS

All types of treatment
(systemic and contact
products)



ALBUZ

SPRAYER CALIBRATION

FIELD CROP SPRAYERS

Driving speed (km/h) =

$$\frac{\text{Distance (m)} \times 3,6}{\text{Time (s)}}$$

Required pressure (bar) =

$$\left(\frac{\text{Required output (l/min)}}{\text{Known output (l/min)}} \right)^2 \times \text{Known pressure (bar)}$$

Application volume (l/ha) =

$$\frac{600 \times \text{l/min (per nozzle)}}{\text{Nozzle spacing (m)} \times \text{km/h}}$$

Nozzle output =

$$\frac{\text{Nozzle spacing (m)} \times \text{l/ha} \times \text{km/h}}{600}$$

AIR ASSISTED SPRAYERS

Determination the size of the nozzles

To determine the total application volume of the nozzles, you first have to establish the speed of the sprayers and the volume per hectare from the chemical manufacturers recommendations on the product label

TOTAL L/MIN =

$$\frac{\text{Row width (m)} \times \text{l/ha} \times \text{km/h}}{600}$$

This amount has to be divided between all the nozzles in function on the mistblower.

CONVERSION FACTORS

	Pressure	Flow rate	Volume	Length	Speed
Unit	1 bar	1 l/min	1 l/hac	1 cm	1 km/h
US metrics	14,51 PSI	0,26 GPM	0,11 GPA	0,39 inch	0,62 mille/h



NOZZLE CROSS-REFERENCE CHART

ALBUZ	agrotop Spray Technology	HYPRO	LECHLER	TeeJet	
 AXI 80°/110°	SPRAY MAX	VP	LU-C	XR VK	
 ADI 110°			AD-C	DG	
 CVI 110°	AIRMIX	GUARDIAN AIR	IDKC	AIXR VK	
 CVI-OC 80°	AIRMIX OC		IDKS		
 CVI-TWIN 110°		GUARDIAN AIR TWIN	IDKTC	AITTJ 60	
 AVI 110°	TURBODROPTD	GUARDIAN AIR	ID3C	AI	
 AVI-UC 110°	TDXLD	ULD Max	ID3	TTI	
 AVI-OC 80°			IS	AIUB	
 AVI-TWIN 110°		GUARDIAN AIR TWIN		AITTJ 60	
 ATR 80°			TR	TXR	
 ATR 60°			TR		
 TVI 80°			ITR	AITXB	
 ATI 80°				TXA / TXB	
 ATI 60°					
 ATF 80°					
 ESI EXA		ESI	FS	SJ7	SJ3
 MSI	DT			TF	
 MVI			FT	TK	

Plastics -
 Ceramics -
 Stainless steel


The right to make technical and design modifications in the course of continuous product development remains reserved.

ALBUZ®

Leader in ceramic spray nozzles

PRESENT IN MORE THAN FIFTY COUNTRIES

www.albuz-spray.com

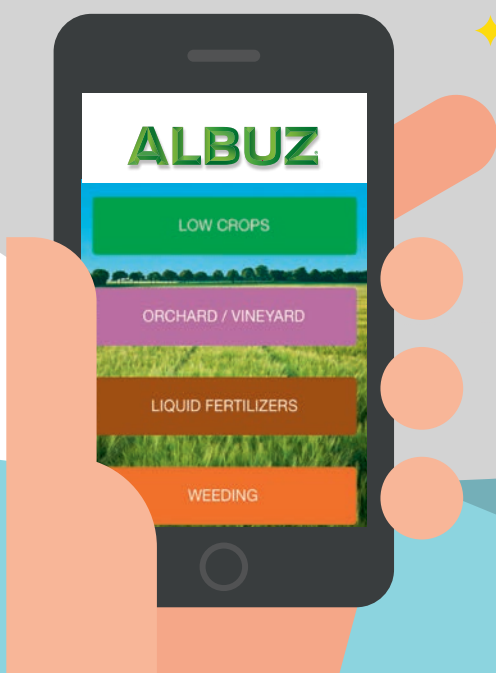

**FREE
APPLICATION
TO DOWNLOAD**



**Quick and simple, select and order
your spray nozzles !**

Conception et réalisation : Lescure et HB • 02 32 40 00 91 - Doc 039561 Rev. P - 10/2025

Your distributor

ZI n°1 - Rue de l'industrie
27025 Evreux cedex, France
Tél. +33 2 32 29 42 01
Fax +33 2 32 39 33 10
www.solcera.com


SOLCERA
Advanced Materials